



2-LEVEL TYRE RACK WITH SHELF 150KG CAPACITY PER LEVEL

MODEL NO: **STR008**

Thank you for purchasing a Sealey product. Manufactured to a high standard, this product will, if used according to these instructions, and properly maintained, give you years of trouble free performance.

IMPORTANT: PLEASE READ THESE INSTRUCTIONS CAREFULLY. NOTE THE SAFE OPERATIONAL REQUIREMENTS, WARNINGS & CAUTIONS. USE THE PRODUCT CORRECTLY AND WITH CARE FOR THE PURPOSE FOR WHICH IT IS INTENDED. FAILURE TO DO SO MAY CAUSE DAMAGE AND/OR PERSONAL INJURY AND WILL INVALIDATE THE WARRANTY. KEEP THESE INSTRUCTIONS SAFE FOR FUTURE USE.



Refer to
instruction
manual



Wear protective
gloves



Wear
safety footwear

1. SAFETY

- ☐ **WARNING!** Ensure Health & Safety, and local authority regulations are adhered to when assembling and using this racking system.
- ✓ Locate the racking in a suitable area where it will not be an obstruction.
- ✓ Keep the general area clean, uncluttered and ensure there is adequate lighting.
- ☐ **WARNING!** Use the racking on a level and solid surface such as concrete.
- ✓ Keep children and unauthorised persons away from the storage area.
- ✗ **DO NOT** use the racking for any purpose other than that for which they are designed.
- ✗ **DO NOT** get the racking wet or use in damp or wet locations or areas where there is condensation.
- ✗ **DO NOT** clean the cross beams with any solvents which may damage the coated surface.
- ✗ **DO NOT** overload the racking.
- ✗ **DO NOT** allow others to ride on the racking.
- ✗ **DO NOT** push loaded racking over edges, rough surfaces etc. as the whole unit may overturn.
- ✓ Ensure that the racking is properly assembled before loading with heavy tyres.
- ✓ Maximum load for each level is 150kg. Load must be evenly distributed.
- ✓ Place heavier items on the lower racks.
- ✓ Maintain correct balance and footing when moving the racking and ensure that the floor surface is not slippery.
- ✓ Where possible heavier items should be evenly distributed across the racks.

2. INTRODUCTION

Galvanised steel frame for enhanced rust resistance, durability and long-lasting performance. 3-Tier Design, two levels for tyre storage and a top shelf for tools and accessories. Boltless design means no tools required to assemble. Assembles quickly with a slot-in system.

3. SPECIFICATION

Model no.: **STR008**
Nett Weight: 10kg
Overall Size (W x D x H): 1200 x 400 x 1800mm
Maximum Capacity: 450kg (150kg/Level)

4. CONTENTS


Carefully unpack the product and check the contents (fig.1) against the list below. Should any items be missing or damaged, immediately contact your Sealey stockist.

A x 1 	D x 6 	F x 4 
B x 8 	E x 3 	G x 8 
C x 6 		

5. ASSEMBLY

WARNING! Before assembly and use, ensure you have read, understood and apply Section 1 safety instructions.

It is recommended that this tyre racking system be assembled by two people. When installing the cross beams it is advisable to use a rubber mallet. **DO NOT** use a hard faced hammer as this will damage the surface finish of the cross beams. Make sure that all the clips lock in place securely and safety bolts are fitted before using the unit. **DO NOT** use any parts that are damaged and/or distorted as these may assemble incorrectly and result in an installation that is unsafe and which may cause injury or damage when the shelves are loaded.

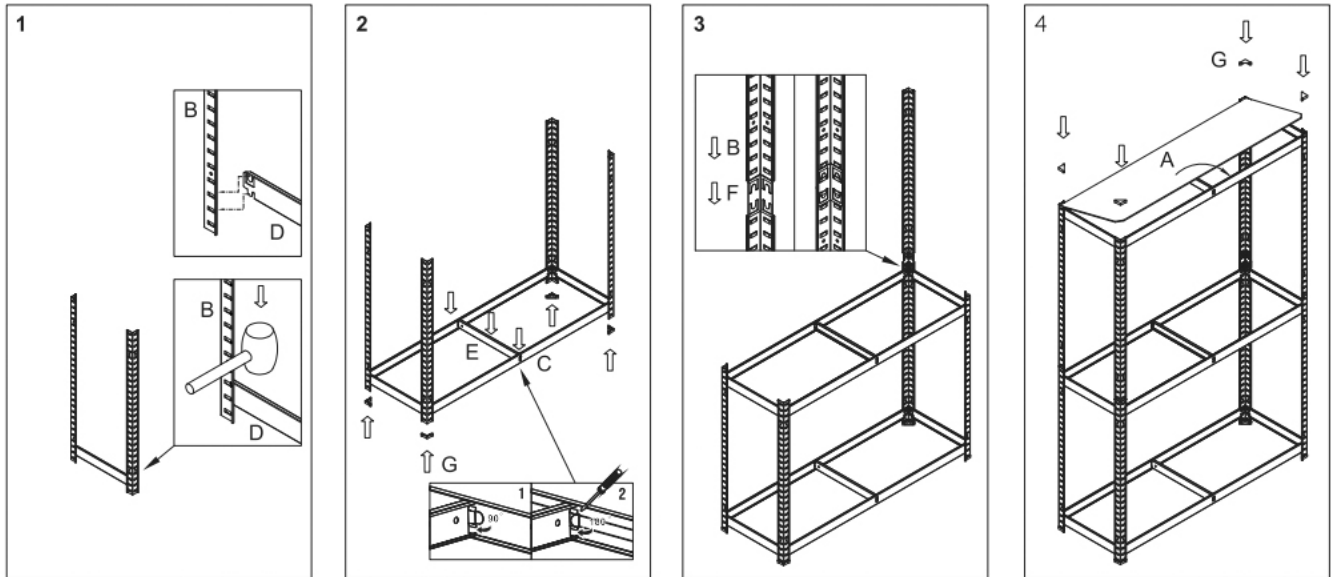

6. MAINTENANCE

6.1. REGULAR INSPECTION

- 6.1.1. Check for damage: Look for bent frames, corrosion, or missing fasteners, especially in high-stress areas.
- 6.1.2. Inspect weight-bearing points: These are most prone to wear and structural compromise.

6.2. CLEANING & PROTECTION

- 6.2.1. Clean frequently: Use mild detergent and water to remove dirt and grime. Dry thoroughly before reloading tyres.

6.3. WEIGHT MANAGEMENT

- 6.3.1. Distribute evenly: Avoid piling tyres unevenly. Stick strictly to the 150kg per level limit.
- 6.3.2. Avoid overloading: Overloading can cause bending, instability, or collapse.

6.4. FASTENERS & COMPONENTS

- 6.4.1. Tighten regularly: Bolts and screws can loosen over time, check and tighten them periodically.
- 6.4.2. Replace worn parts

6.5. STAFF TRAINING & SAFETY

- 6.5.1. Educate users: Train staff on proper loading/unloading and weight limits.
- 6.5.2. Routine checks: Establish regular safety inspections and maintenance reporting.

6.5.3. TIRE STORAGE BEST PRACTICES

- 6.5.4. Store upright: Keep tyres in a single row with clearance from the ground to prevent deformation.
- 6.5.5. Rotate regularly: Rotate tires every four weeks to maintain shape.

6.6. ENVIRONMENTAL CONTROL

- 6.6.1. Dry, ventilated space: Avoid direct sunlight, heat sources, ozone-producing equipment, and chemicals.

6.7. IMPACT PROTECTION

- 6.7.1. Install guards: Use safety shields to protect the rack from forklifts or other vehicles

Parts support is available for these products. Please email sales@sealey.co.uk or telephone 01284 757500



ENVIRONMENT PROTECTION

Recycle unwanted materials instead of disposing of them as waste. All tools, accessories and packaging should be sorted, taken to a recycling centre and disposed of in a manner which is compatible with the environment. When the product becomes completely unserviceable and requires disposal, drain any fluids (if applicable) into approved containers and dispose of the product and fluids according to local regulations.



REGISTER YOUR
PURCHASE HERE

Note: It is our policy to continually improve products and as such we reserve the right to alter data, specifications and component parts without prior notice.

Important: No Liability is accepted for incorrect use of this product.

Warranty: Guarantee is 12 months from purchase date, proof of which is required for any claim.

Jack Sealey Ltd t/a Sealey Group, Kempson Way, Suffolk Business Park, Bury St Edmunds, Suffolk, IP32 7AR UK
Jack Sealey (EU) Ltd t/a Sealey Group, Farney Street, Carrickmacross, Co. Monaghan, A81 PK68 Ireland
Tel: 01284 757500 • **Email:** sales@sealey.co.uk • **Web:** www.sealey.co.uk