

# SEALEY

## 12PC WHEEL STUD INSTALLER KIT

MODEL NO: **SX228**

Thank you for purchasing a Sealey product. Manufactured to a high standard, this product will, if used according to these instructions, and properly maintained, give you years of trouble free performance.

**IMPORTANT:** PLEASE READ THESE INSTRUCTIONS CAREFULLY. NOTE THE SAFE OPERATIONAL REQUIREMENTS, WARNINGS & CAUTIONS. USE THE PRODUCT CORRECTLY AND WITH CARE FOR THE PURPOSE FOR WHICH IT IS INTENDED. FAILURE TO DO SO MAY CAUSE DAMAGE AND/OR PERSONAL INJURY AND WILL INVALIDATE THE WARRANTY. KEEP THESE INSTRUCTIONS SAFE FOR FUTURE USE.



Refer to instruction manual



Wear eye protection

### 1. SAFETY

- WARNING!** Ensure Health and Safety, local authority and general workshop practice regulations are adhered to when using tools.
- DO NOT** use tools if damaged.
- Maintain tools in good and clean condition for best and safest performance.
- Ensure that the vehicle manufacturer's recommended jacking points are used when jacking up a vehicle.
- Ensure that a vehicle which has been jacked up is adequately supported with axle stands.
- Wear approved eye protection. A full range of personal safety equipment is available from your Sealey stockist
- Wear suitable clothing to avoid snagging. **DO NOT** wear jewellery and tie back long hair.
- DO NOT** use air tools.
- DO NOT** use this tool whilst tired or under the influence of alcohol, drugs or intoxicating medication.
- DO NOT** allow untrained personnel to use this tool.
- Account for all tools, and parts being used and **DO NOT** leave them near the engine.
- When not in use store in a safe, dry, childproof location.
- IMPORTANT:** Always refer to the vehicle manufacturer's service instructions, or a proprietary manual, to establish the current procedure and data.
- WARNING:** The warnings, cautions and instructions in this manual cannot cover all possible conditions and situations that may occur. It must be understood that common sense and caution are factors which cannot be built into this product, but must be applied by the operator.

### 2. INTRODUCTION


Designed for installing wheel studs without ruining studs or lug nuts. Pulls stud into the drive flange or hub without damaging threads. Includes installers, spacers and corresponding rethreader dies. For use in applications on most major vehicle platforms including light trucks and SUVs.

### 3. CONTENTS



## 4. OPERATION

- 4.1. Consult appropriate Manufacturer's data and remove broken/damaged stud.
- 4.2. Insert new stud through hub and assemble in this order from hub outwards, refer to fig. 1:  
Spacer 22.2x35x13.7 thick  
Spacer 22.2x35x3.1 thin  
Installer Socket of appropriate thread  
**NOTE:** Make sure spacers are in line, refer to fig.2.
- 4.3. Use 30mm socket to pull the new stud into position. Check splined end of stud has been pulled fully into position.
- 4.4. Remove installer and spacers and replace into blow moulded case.

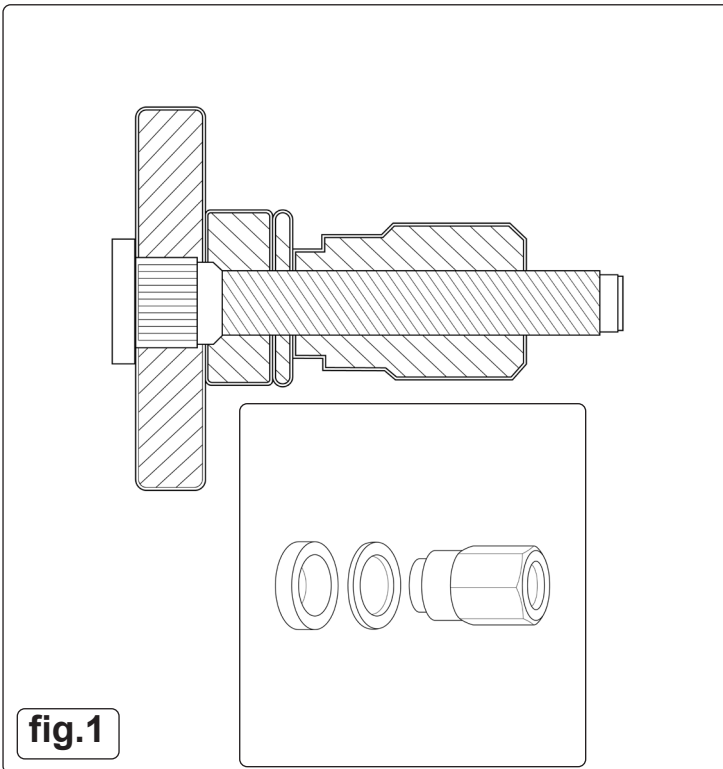

### ENVIRONMENT PROTECTION

Recycle unwanted materials instead of disposing of them as waste. All tools, accessories and packaging should be sorted, taken to a recycling centre and disposed of in a manner which is compatible with the environment. When the product becomes completely unserviceable and requires disposal, drain any fluids (if applicable) into approved containers and dispose of the product and fluids according to local regulations.



REGISTER YOUR PURCHASE HERE

**Note:** It is our policy to continually improve products and as such we reserve the right to alter data, specifications and component parts without prior notice.

**Important:** No Liability is accepted for incorrect use of this product.

**Warranty:** Guarantee is 12 months from purchase date, proof of which is required for any claim.

Sealey Group, Kempson Way, Suffolk Business Park, Bury St Edmunds, Suffolk. IP32 7AR



01284 757500



sales@sealey.co.uk



www.sealey.co.uk