



MULTIPURPOSE SYPHON & PUMP KIT

MODEL NO: TP50.V4

Thank you for purchasing a Sealey product. Manufactured to a high standard, this product will, if used according to these instructions, and properly maintained, give you years of trouble free performance.

IMPORTANT: PLEASE READ THESE INSTRUCTIONS CAREFULLY. NOTE THE SAFE OPERATIONAL REQUIREMENTS, WARNINGS & CAUTIONS. USE THE PRODUCT CORRECTLY AND WITH CARE FOR THE PURPOSE FOR WHICH IT IS INTENDED. FAILURE TO DO SO MAY CAUSE DAMAGE AND/OR PERSONAL INJURY AND WILL INVALIDATE THE WARRANTY. KEEP THESE INSTRUCTIONS SAFE FOR FUTURE USE.



Refer to instructions



Wear eye protection



Wear protective gloves



Wear safety footwear



Wear protective clothing

1. SAFETY

- WARNING! DO NOT** operate using flammable liquids in a confined space, the area should have adequate ventilation.
- ✓ If pumping flammable liquids, avoid proximity to naked flames or welding operations.
- ✓ Wear appropriate protective clothing when pumping solvents. We recommend eye/face and hand protection, available from your authorised Sealey dealer.
- ✓ Ensure Health & Safety, local authority, and general workshop practice regulations are adhered to when using this equipment.
- ✓ Ensure spillages are dealt with immediately. Failure to do so could lead to personal injury or damage to the environment and possible prosecution by the authorities.
- ✓ Keep children away from areas where solvents are being used.

2. INTRODUCTION

Composite pump assembly suitable for the syphoning of fluids including diesel, petrol, oil, detergents and pesticides. Not suitable for use with aggressive detergents and solvents. Supplied with two 1.3m transfer hoses and a 1.2m narrow bore hose for performing oil extraction through the dipstick tube. The pump may also be used on inflatables such as footballs and tyres - a 400mm hose and various clip-on connectors are supplied for this purpose.

3. SPECIFICATION

Model No	TP50.V4
Transfer Pump Hose (x2)	1300mm
Small Bore Extraction Hose	1200mm
Air Pump Hose	400mm

4. OPERATION

4.1. TO USE AS A SYPHON

- 4.1.1. Insert one end of each of the two red, hoses into the black connectors (A), fig.1.
- 4.1.2. Push the red hoses right into the nozzles. Then ensure the black connectors (A) are pushed securely over the nozzles.
- 4.1.3. Put the red hose from the top nozzle (intake) into the liquid to be transferred. Then insert the red hose from the bottom nozzle (discharge) into where the liquid is to be discharged.

NOTE: For proper syphoning the discharge hose must be lower than the intake hose.

- 4.1.4. Pump the handle 3 or 4 times to prime it, once the liquid begins to flow, it will flow without further pumping.

- WARNING!** After syphoning petrol, oil or any other flammable liquid, it is very important to clean the pump.

4.2. TO CHANGE OIL


- 4.2.1. Follow steps 4.1.1 & 4.1.2 above. Insert the dipstick tube into the black adapter (B) and insert the adapter (and dipstick tube) into the end of the top (intake) red hose. Insert the other end of the dipstick tube into the engine's dipstick hole and lower it in until it reaches the bottom of the oil sump. Place the bottom (discharge) red hose into a drain pan and begin pumping.

4.3. TO USE AS AN AIR PUMP

- 4.3.1. Place the air pressure hose into the bottom nozzle (discharge) and tighten securely, begin pumping. To inflate pool toys, beach balls, etc place an inflation needle into the threaded adapter on the end of the air pressure hose, then begin pumping.

5. MAINTENANCE

- 5.1. Flushing the pump with water is usually all that is needed for cleaning. For more thorough cleaning the pump can be disassembled, without the use of tools, and cleaned.

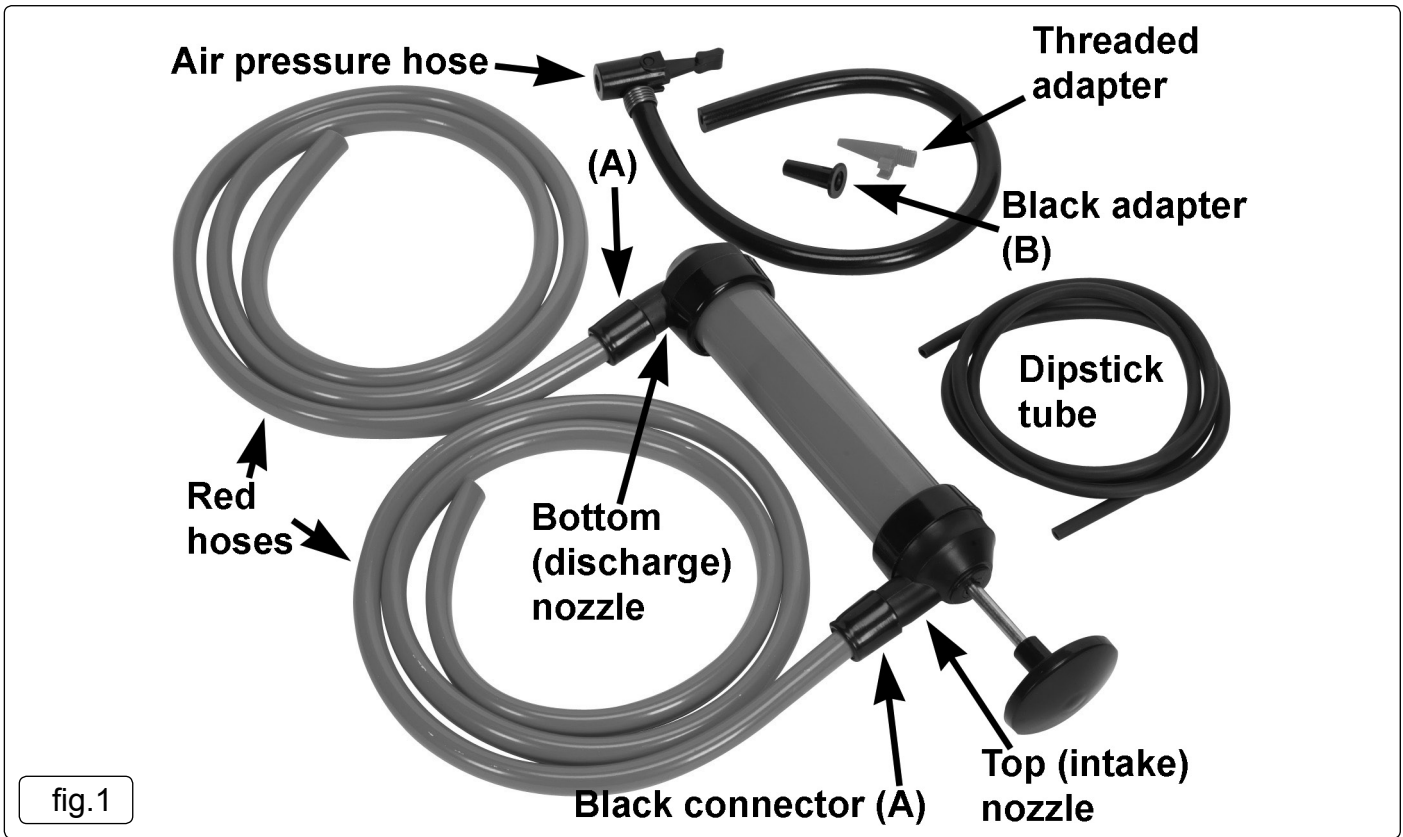

ENVIRONMENT PROTECTION

Recycle unwanted materials instead of disposing of them as waste. All tools, accessories and packaging should be sorted, taken to a recycling centre and disposed of in a manner which is compatible with the environment. When the product becomes completely unserviceable and requires disposal, drain any fluids (if applicable) into approved containers and dispose of the product and fluids according to local regulations.

Note: It is our policy to continually improve products and as such we reserve the right to alter data, specifications and component parts without prior notice. Please note that other versions of this product are available. If you require documentation for alternative versions, please email or call our technical team on technical@sealey.co.uk or 01284 757505.

Important: No Liability is accepted for incorrect use of this product.

Warranty: Guarantee is 12 months from purchase date, proof of which is required for any claim.

Sealey Group, Kempson Way, Suffolk Business Park, Bury St Edmunds, Suffolk. IP32 7AR



01284 757500



01284 703534



sales@sealey.co.uk



www.sealey.co.uk