



INSTRUCTIONS FOR:

LEVER ACTION PUMP

Model: TP6601

Thank you for purchasing a Sealey product. Manufactured to a high standard this product will give you years of trouble free performance if these instructions are carefully followed and the product is correctly maintained.



IMPORTANT: PLEASE READ THESE INSTRUCTIONS CAREFULLY. NOTE THE SAFE OPERATIONAL REQUIREMENTS, WARNINGS AND CAUTIONS. USE THIS PRODUCT CORRECTLY AND WITH CARE FOR THE PURPOSE FOR WHICH IT IS INTENDED. FAILURE TO DO SO MAY CAUSE DAMAGE OR PERSONAL INJURY AND WILL INVALIDATE THE WARRANTY. PLEASE RETAIN THESE INSTRUCTIONS FOR FUTURE USE.

1. SAFETY INSTRUCTIONS



- p **WARNING!** Ensure health & safety, local authority, and general workshop practice regulations are strictly adhered to when using this equipment.
- 3 Familiarise yourself with product application and limitations, as well as the specific potential hazards peculiar to this product.
- 3 Maintain the pump in good condition (use an authorised service agent).
- 3 Replace or repair damaged parts. *Use genuine parts only. Non authorised parts will invalidate the warranty.*
- 3 Use only to pump NON-Corrosive fluids such as oil, anti-freeze, degreasants, solvents, agricultural and industrial chemicals.
- 3 Ensure safety eye protection and protective clothing are worn when using this product.
- 3 Keep the work area clean, uncluttered and ensure there is adequate lighting.
- 3 Maintain correct balance and footing. Ensure the floor is not slippery and wear non slip shoes.
- 3 Keep children and unauthorised persons away from the working area.
- 3 Dispose of waste liquids in accordance with local authority regulations.
- 7 **DO NOT** use to extract corrosive fluids.
- 7 **DO NOT** dismantle, tamper with or adapt the pump for any purpose other than for which it is designed.
- 7 **DO NOT** use the unit if it has been dropped or mishandled, check the unit to ensure there is no damage.
- 7 **DO NOT** use the pump as a handle to move the fluid drum.
- 3 Keep the pump clean and store in a safe dry, childproof location.
- p **WARNING! DO NOT** allow uncontrolled discharge of fluids thus polluting the environment.

2. APPLICATION

Self-priming lever pump fitted with anti-drip nozzle, 2" BSP connector and dip-tube to suit 50 to 205ltr drums. Suitable for oils, antifreeze, paraffin and other non-corrosive fluids. Approximately 480ml per stroke discharge. Supplied with 1400mm flexible delivery tube. Optional 1200mm dip-tube Model No. TP66/ACC.

3. INSTALLATION

- 3.1 Attach the spout (fig.1) or flexible tube (fig.2) to the pump.
- 3.2 Slide the lower dip-tube inside the upper dip-tube (fig.3) and pull through and then insert the suction tube into the underside of the pump.
- 3.3 Insert the pump into the 2" BSP drum opening and hand tighten.

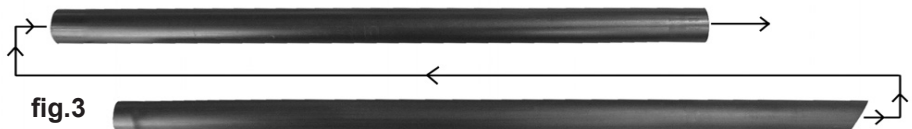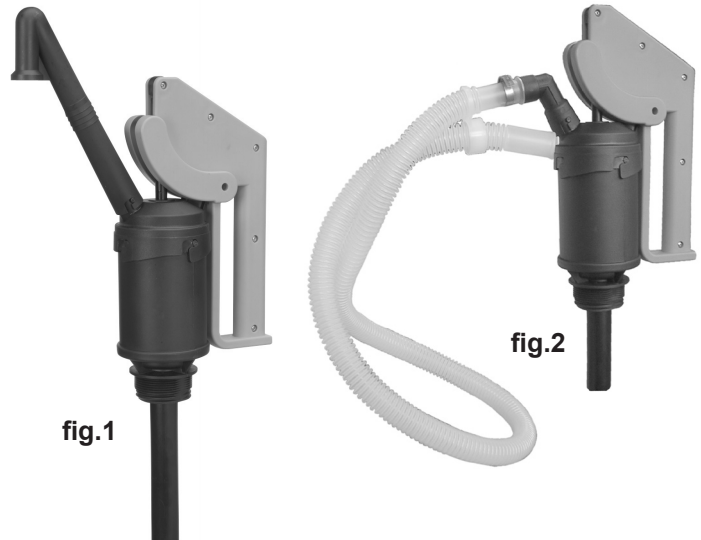

NOTE: It is our policy to continually improve products and as such we reserve the right to alter data, specifications and component parts without prior notice.

IMPORTANT: No liability is accepted for incorrect use of product.

WARRANTY: Guarantee is 12 months from purchase date, proof of which will be required for any claim.

INFORMATION: Call us for a copy of our latest catalogue on 01284 757525 and leave your full name and address including your postcode.



Sole U.K. Distributor
Sealey Group
Bury St. Edmunds
Suffolk.



01284 757500

01284 703534



www.sealey.co.uk



sales@sealey.co.uk