

Thank you for purchasing a Sealey product. Manufactured to a high standard this product will give you years of trouble free performance if these instructions are carefully followed and the product is correctly maintained.



IMPORTANT: PLEASE READ THESE INSTRUCTIONS CAREFULLY. NOTE THE SAFE OPERATIONAL REQUIREMENTS, WARNINGS AND CAUTIONS. USE THIS PRODUCT CORRECTLY AND WITH CARE FOR THE PURPOSE FOR WHICH IT IS INTENDED. FAILURE TO DO SO MAY CAUSE DAMAGE OR PERSONAL INJURY, AND WILL INVALIDATE THE WARRANTY. PLEASE RETAIN THESE INSTRUCTIONS FOR FUTURE USE.

fig 1 TP67 Gear Oil Pump


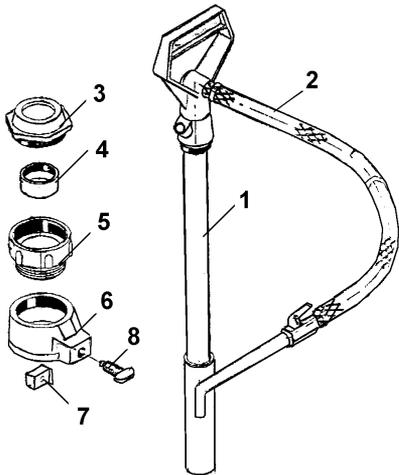


fig 2 TP67/X Adaptor kit

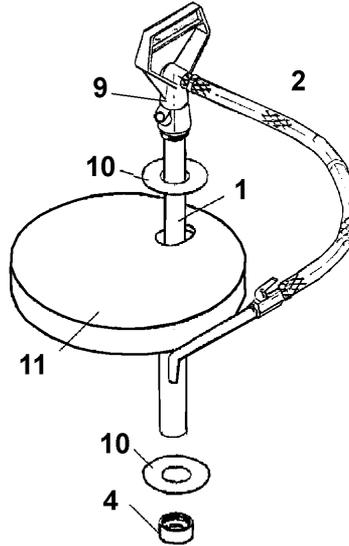

PARTS LIST Refer to figs 1 & 2.

ITEM	PART NO	DESCRIPTION
1	TP67/01	Pump assembly
2	TP67/02	Hose assembly
3	TP67/03	2" BSP adaptor
4	TP67/04	Lock nut
5	TP67/05	Trisure adaptor
6	TP67/06	Multi-neck adaptor
7	TP67/07	Clamp pad
8	TP67/08	Clamping screw
9	TP67/01	Pump assembly
10	TP67/010	Washer
11	TP67/011	Lid (spinning)

1. SAFETY INSTRUCTIONS

- WARNING!** Ensure all health and safety, local authority, and general workshop practice regulations are strictly adhered to when using this equipment.
- Familiarise yourself with the application and limitations of this product, as well as the specific potential hazards peculiar to the area.
- Ensure safety eye protection and protective clothing are worn when using this product.
- Keep the work area clean, uncluttered and ensure there is adequate lighting.
- Dispose of waste liquids in accordance with local with local authority regulations.
- DO NOT use the pump to transfer solvents, (see application below).
- DO NOT use the pump for any purpose other than for which it is designed.
- DO NOT place the oil drum on an uneven surface, or in contact with any heat source.
- DO NOT attempt to move the oil drum by pulling on the oil supply or the fluid transfer hose.
- Keep the pump clean and store in a safe dry location when not in use.

2. APPLICATION

TP67/X is an adaptor kit designed for use with a container that will not accept direct mounting of Gear Oil pump TP67. With the TP67/X adaptor the pump fixes to a top-plate which will in turn attach to the top of the container. Follow assembly instruction to adapt the TP67 accordingly.

Note: As a rule if the chemical you want to pump is delivered in a plastic container then you can use a plastic pump to transfer it. The TP67 and TP67/X can not be used for the transfer of solvents. The unit will handle most disinfectants, detergents, pesticides, degreasers, mild acids, alkalis, oils, weed-killers and chemical additives. If in doubt as to the suitability of use with a particular substance contact your local Sealey supplier for advice.

3. ASSEMBLY

3.1. Preparations for assembly.

- 3.1.1. Remove parts 3,5,6,7,8 from the main pump assembly (fig 1), and store in a safe place for future use.
- 3.1.2. Identify parts 1,2 & 4, and keep for to use for Adaptor assembly.

3.2. Adaptor assembly.

- 3.2.1. Assemble as shown (fig 2) incorporating parts 1, 2 from the main pump assembly.
- 3.2.2. Take part 4 (lock nut), invert it, and fit it to the end of the pump.

NOTE: It is our policy to continually improve products and as such we reserve the right to alter data, specifications and component parts without prior notice.

IMPORTANT: No liability is accepted for incorrect use of product. **WARRANTY:** Guarantee is 12 months from purchase date, proof of which will be required for any claim. **INFORMATION:** Call us for a copy of our latest catalogue on 01284 757525 and leave your full name and address including your postcode.

