



™ LEVER ACTION PUMP

MODEL NO: TP6803.V2

Thank you for purchasing a Sealey product. Manufactured to a high standard, this product will, if used according to these instructions, and properly maintained, give you years of trouble free performance.

IMPORTANT: PLEASE READ THESE INSTRUCTIONS CAREFULLY. NOTE THE SAFE OPERATIONAL REQUIREMENTS, WARNINGS & CAUTIONS. USE THE PRODUCT CORRECTLY AND WITH CARE FOR THE PURPOSE FOR WHICH IT IS INTENDED. FAILURE TO DO SO MAY CAUSE DAMAGE AND/OR PERSONAL INJURY AND WILL INVALIDATE THE WARRANTY. KEEP THESE INSTRUCTIONS SAFE FOR FUTURE USE.



Refer to
instruction
manual



Wear eye
protection



Wear
protective
clothing

1. SAFETY

- ☐ **WARNING!** Ensure health & safety, local authority, and general workshop practice regulations are strictly adhered to when using this equipment.
- ✓ Familiarise yourself with product application and limitations, as well as the specific potential hazards peculiar to this product.
- ✓ Maintain the pump in good condition (use an authorised service agent).
- ✓ Replace or repair damaged parts. *Use genuine parts only. Non authorised parts will invalidate the warranty.*
- ✓ Use only to pump NON-Corrosive fluids such as oil, anti-freeze, degreasants, solvents, agricultural and industrial chemicals, and the like. Ensure safety eye protection and protective clothing are worn when using this product.
- ✓ Keep the work area clean, uncluttered and ensure there is adequate lighting.
- ✓ Maintain correct balance and footing. Ensure the floor is not slippery.
- ✓ Keep children and unauthorised persons away from the working area.
- ✓ Dispose of waste liquids in accordance with local authority regulations.
- ✗ **DO NOT** use to extract corrosive fluids.
- ✗ **DO NOT** dismantle, tamper with or adapt the pump for any purpose other than for which it is designed.
- ✗ **DO NOT** use the unit if it has been dropped or mishandled, check the unit to ensure there is no damage.
- ✗ **DO NOT** use the pump as a handle to move the fluid drum.
- ✓ Keep the pump clean and store in a safe dry, childproof location.
- ☐ **WARNING! DO NOT** allow uncontrolled discharge of fluids thus polluting the environment.


2. INTRODUCTION

Polypropylene lever pump with steel rod and dip tube, suitable for use with oils, antifreeze and other non-corrosive fluids. Features polyoxymethylene handle to prevent aggressive fluids melting the handle. Fitted with 360° outlet nozzle. Suitable for 205L drums. Delivers approximately 300ml per stroke.

3. CONTENTS



Unpack and identify the parts shown in fig.1.

1. Handle
2. Pump Body
3. Lower tube (with seal)
4. Sliding Tube
5. Upper Tube
6. Spout
7. Pivot bolts & nuts x 2

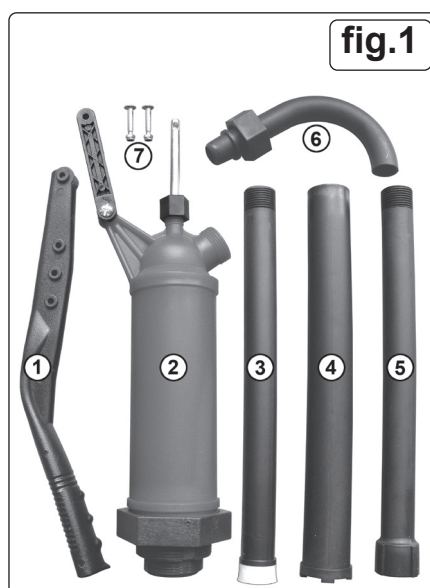

4. ASSEMBLY

- 4.1. Assemble the Spout (6) to the Pump Body (2).
- 4.2. Attach the handle (1) to the plunger and pivot on the pump body using the pivot Bolts (7) as shown in fig.2. Choose the outer pivot hole on the handle (1) for the longest stroke.
- 4.3. Assemble the extendible dip tube as shown in fig.3. Firstly insert the lower tube with seal (3) into the bottom of the sliding tube (4). See fig.3A. Push on the lower tube so that it emerges from the top of the sliding tube as shown in fig.3B. Screw the top of the lower tube (3) into the bottom of the upper tube (5). See fig.3C.
- 4.4. Screw the top of the upper tube (5) into the bottom of the pump body. See fig.3C.
- 4.5. Adjust length of dip tube and insert into container. Screw base of pump into container opening. The unit is now ready for pumping.

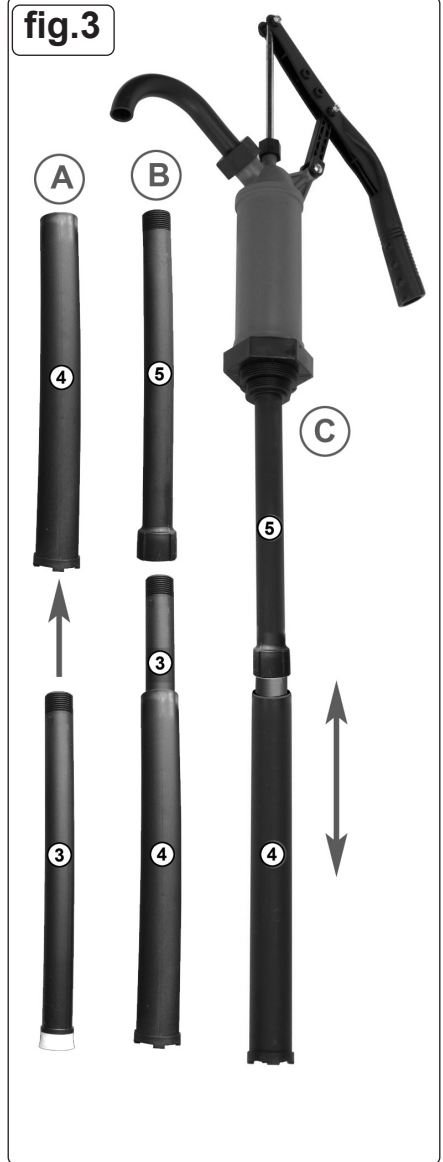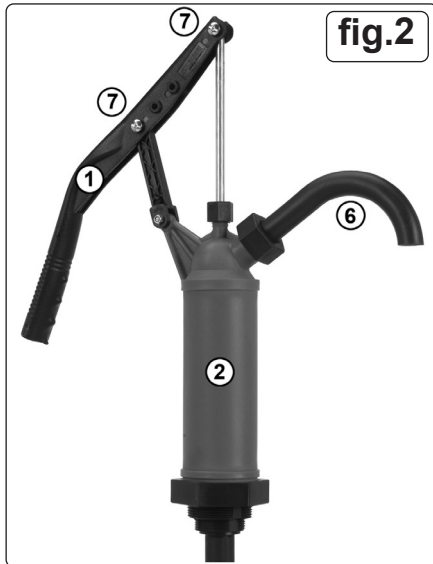

ENVIRONMENT PROTECTION

Recycle unwanted materials instead of disposing of them as waste. All tools, accessories and packaging should be sorted, taken to a recycling centre and disposed of in a manner which is compatible with the environment. When the product becomes completely unserviceable and requires disposal, drain any fluids (if applicable) into approved containers and dispose of the product and fluids according to local regulations.



REGISTER YOUR PURCHASE HERE

Note: It is our policy to continually improve products and as such we reserve the right to alter data, specifications and component parts without prior notice. Please note that other versions of this product are available. If you require documentation for alternative versions, please email or call our technical team on technical@sealey.co.uk or 01284 757505.

Important: No Liability is accepted for incorrect use of this product.

Warranty: Guarantee is 12 months from purchase date, proof of which is required for any claim.

Jack Sealey Ltd t/a Sealey Group, Kempson Way, Suffolk Business Park, Bury St Edmunds, Suffolk, IP32 7AR UK
Jack Sealey (EU) Ltd t/a Sealey Group, Farney Street, Carrickmacross, Co. Monaghan, A81 PK68 Ireland
Tel: 01284 757500 • **Email:** sales@sealey.co.uk • **Web:** www.sealey.co.uk