

# SEALEY

## HIGH FLOW HEAVY-DUTY ROTARY PUMP FOR 205L DRUM

MODEL NO: TP6807

Thank you for purchasing a Sealey product. Manufactured to a high standard, this product will, if used according to these instructions, and properly maintained, give you years of trouble free performance.

**IMPORTANT:** PLEASE READ THESE INSTRUCTIONS CAREFULLY. NOTE THE SAFE OPERATIONAL REQUIREMENTS, WARNINGS & CAUTIONS. USE THE PRODUCT CORRECTLY AND WITH CARE FOR THE PURPOSE FOR WHICH IT IS INTENDED. FAILURE TO DO SO MAY CAUSE DAMAGE AND/OR PERSONAL INJURY AND WILL INVALIDATE THE WARRANTY. KEEP THESE INSTRUCTIONS SAFE FOR FUTURE USE.



Refer to  
instruction  
manual



Wear eye  
protection



Wear  
protective  
clothing

### 1. SAFETY

- WARNING!** Ensure health & safety, local authority, and general workshop practice regulations are strictly adhered to when using this equipment.
- ✓ Familiarise yourself with the applications, limitations and potential hazards of this product.
- ✓ Maintain the pump in good condition (use an authorised service agent).
- ✓ Replace or repair damaged parts. Use genuine parts only. Non authorised parts will invalidate the warranty.
- ✓ Use only with oils, diesel, anti-freeze and other non-corrosive fluids.
- ✓ Ensure safety eye protection and protective clothing are worn when using this product.
- ✓ Keep the work area clean, uncluttered and ensure that there is adequate lighting.
- ✓ Maintain correct balance and footing. Ensure the floor is not slippery and wear non-slip shoes.
- ✓ Keep children and unauthorised persons away from the work area.
- ✓ Dispose of waste liquids in accordance with local authority regulations.
- WARNING! DO NOT** allow uncontrolled discharge of fluids, thus polluting the environment.
- ✗ **DO NOT** dismantle, tamper with or adapt the pump for any purpose other than for which it is designed.
- ✗ **DO NOT** use the pump if it has been dropped or mishandled, check the pump to ensure that it is not damaged.
- ✗ **DO NOT** use the pump as a handle to move the fluid container.
- ✗ **DO NOT** use the pump to transfer hazardous or harmful chemicals, corrosive liquids, solvents, alkalies, acids or petrol.
- ✗ **DO NOT** use the pump with water.
- ✗ **DO NOT** use the pump for any purpose other than for which it is designed.
- ✗ **DO NOT** use whilst under the influence of drugs, alcohol or other intoxicating medication, or if you are fatigued.
- ✓ Keep the pump clean and well oiled and store in a safe, dry, childproof location when not in use.

### 2. INTRODUCTION

Heavy-duty cast steel body suitable for use with low viscosity products such as oils, diesel, antifreeze and other non-corrosive fluids. Supplied with 2" BSP adaptor and 3pc dip-tube suitable for use on 205L drums. Delivers approximately 1L/revolution, emptying a 205L drum in three minutes.


### 3. CONTENTS

Refer to fig.1

1. Handle + screw
2. Pump body
3. Lower tube with filter
4. Upper tubes x2
5. 2" BSP drum top attachment
6. Output tube + clip

### 4. ASSEMBLY

- 4.1. Attach the handle (1) to the pump's spindle and secure in place with screw.
- 4.2. Assemble the tubes as follows, firstly screw one of the upper tubes (4) into the pump and then slide the drum top attachment (5) over the tube and secure it in place by tightening the thumb screw. Screw the other upper tube into the first tube (if full depth required), and then screw the lower tube (3) into the upper tube.
- 4.3. Attach the Output pipe (6) onto the pump outlet ensuring it is pushed fully home. Secure it in place using the clip.
- 4.4. Before using the pump for the first time, it needs to be filled with oil. Stand the pump in its normal upright position and remove the oil filler cap on the front of the pump. Fill with suitable oil (SAE 30 or equivalent), until it is level with the bottom of the filler aperture. Re-fit the oil filler cap and tighten.
- 4.5. Feed lower tube into fluid container and secure the drum top attachment onto the container top (if required). The pump is now ready to use.
- 4.6. Turn the pump handle in a clockwise direction to pump fluid.
- 4.7. Periodically remove the filter by unscrewing it from the bottom tube and clean it in paraffin before re-fitting it.

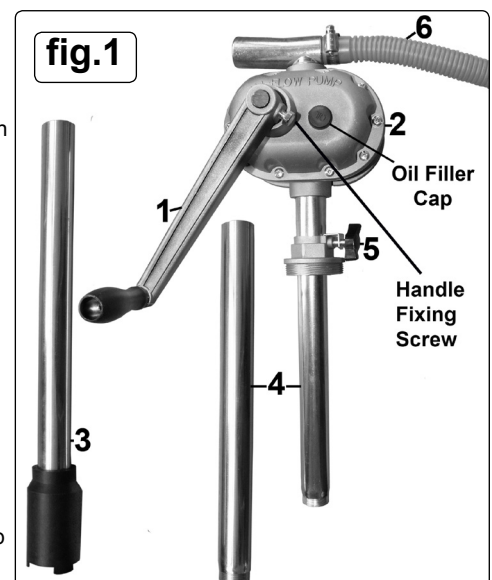



#### **ENVIRONMENT PROTECTION**

Recycle unwanted materials instead of disposing of them as waste. All tools, accessories and packaging should be sorted, taken to a recycling centre and disposed of in a manner which is compatible with the environment. When the product becomes completely unserviceable and requires disposal, drain any fluids (if applicable) into approved containers and dispose of the product and fluids according to local regulations.

**Note:** It is our policy to continually improve products and as such we reserve the right to alter data, specifications and component parts without prior notice.

**Important:** No Liability is accepted for incorrect use of this product.

**Warranty:** Guarantee is 12 months from purchase date, proof of which is required for any claim.

**Sealey Group, Kempson Way, Suffolk Business Park, Bury St Edmunds, Suffolk. IP32 7AR**



**01284 757500**



**01284 703534**



**sales@sealey.co.uk**



**www.sealey.co.uk**