

Thank you for purchasing a Sealey product. Manufactured to a high standard this product will, if used according to these instructions and properly maintained, give you years of trouble free performance.

! **IMPORTANT: PLEASE READ THESE INSTRUCTIONS CAREFULLY. NOTE THE SAFE OPERATIONAL REQUIREMENTS, WARNINGS AND CAUTIONS. USE THIS PRODUCT CORRECTLY AND WITH CARE FOR THE PURPOSE FOR WHICH IT IS INTENDED. FAILURE TO DO SO MAY CAUSE DAMAGE AND/OR PERSONAL INJURY AND WILL INVALIDATE THE WARRANTY. PLEASE KEEP INSTRUCTIONS SAFE FOR FUTURE USE.**

1. SAFETY INSTRUCTIONS

! **WARNING! Ensure that the table saw to which you will attach these extensions is unplugged from the mains power supply before you commence assembly.**



- ✓ Inspect the table saw to see that the mounting points for the extensions and supports are in good condition.
- ✓ When all three extensions are fitted the table surface is considerably enlarged. Ensure that there is still sufficient space around the saw for safe working practice.
- ✓ Ensure that the enlarged saw is sufficiently well fixed down to cope with the extra weight of enlarged workpieces such as heavy sheet material.

2. CONTENTS

- | | |
|---------------------------------|-------------------------------------|
| 2 x Table width extensions. (A) | 2 x Long supports. (D) |
| 1 x Table length extension. (B) | 1 x Pack of fixings. |
| 4 x Short supports. (C) | (M10 bolts, washers and locknuts) |

3. ASSEMBLY

- 3.0 You will need two 10mm spanners in order to prevent the fixings rotating whilst they are being tightened
- 3.1 Take one side extension piece (A) and fix it loosely to one side of the saw table as shown in fig.1 using the bolts, nuts & washers provided.
- 3.2 Now take two short supports (C) and fix them loosely between the extension and body of the saw as indicated in fig.2. The top of each support should be on the inside face of the extension with only a washer and bolt head showing on the outside. The bolt which fixes the lower end of each support goes directly into a threaded insert in the main body of the saw.
- 3.3 Ensure that the edge of the extension in contact with the main table is level with the main table and then tighten the two fixings.
- 3.4 Using a "straight edge" or spirit level ensure that the whole surface of the extension is level with the top face of the main table and then finally tighten the fixings on the two supports.
- 3.5 Mount the second side extension using the same process as detailed above.
- 3.6 Mount the table length extension (B) using the same process as detailed above but using the two long supports (D).

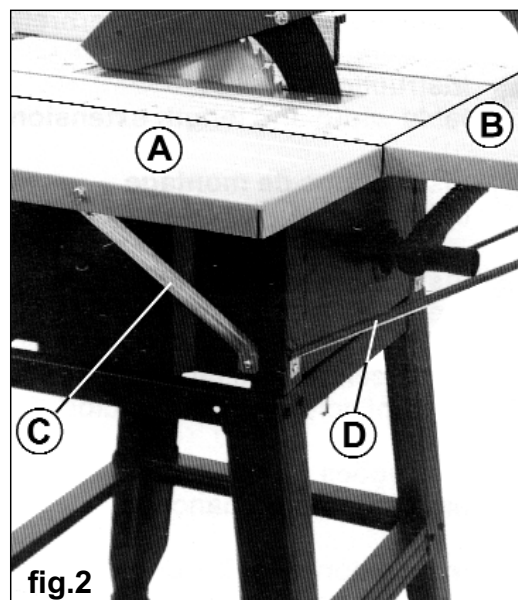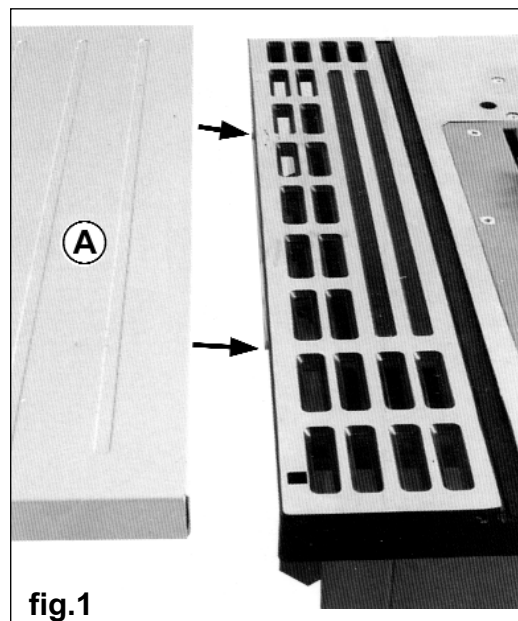

NOTE: It is our policy to continually improve products and as such we reserve the right to alter data, specifications and component parts without prior notice.

IMPORTANT: No responsibility is accepted for incorrect use of this equipment.

WARRANTY: Guarantee is 12 months from purchase date, proof of which will be required for any claim.

INFORMATION: For a copy of our latest catalogue and promotions call us on 01284 757525 and leave your name and address, including postcode.

