

Instructions for:

SAC CLUTCH ALIGNMENT TOOL

MODEL No: VS011A

Thankyou for purchasing this Sealey product. Manufactured to a high standard this product will, if used according to these instructions and properly maintained, give you years of trouble free performance.



IMPORTANT: READ THESE INSTRUCTIONS CAREFULLY. NOTE THE SAFE OPERATIONAL REQUIREMENTS, WARNINGS AND CAUTIONS. USE THIS JACK CORRECTLY AND WITH CARE FOR THE PURPOSE FOR WHICH IT IS INTENDED. FAILURE TO DO SO MAY CAUSE DAMAGE OR PERSONAL INJURY AND WILL INVALIDATE THE WARRANTY. RETAIN THESE INSTRUCTIONS FOR FUTURE USE.

1. SAFETY INSTRUCTIONS

- WARNING! Ensure that Health and Safety, local authority and general workshop practice regulations are adhered to when using this tool.
- X DO NOT use this tool if damaged.
- ✓ Maintain tool in a good and clean condition for best and safest performance.
- ✓ Ensure that the ignition key is removed, to prevent inadvertent engine cranking.
- ✓ If the vehicle to be worked on is raised, ensure that it is adequately supported with axle stands or ramps and chocks.
- ✓ Wear suitable clothing to avoid snagging. DO NOT wear loose jewellery and tie back long hair.
- ✓ Account for all tools and parts being used.
- ✓ If working off the vehicle, ensure that the workpiece is secure and stable.
- X DO NOT use the alignment tool if you are tired or under the influence of alcohol, drugs or intoxicating medication.

IMPORTANT: Always refer to the individual vehicle manufacturer's service instructions, or a proprietary manual, to establish the correct procedure and data for the use of this tool.


This document is provided as a guide only.


2. SPECIFICATION

Necessary for pre-tensioning self adjusting clutches before removal or installation. Prevents plate distortion which may prevent the clutch from disengaging or cause dragging. Features a resetting tool - allowing the clutch adjuster to be wound back, and six alignment adaptors.

Alignment adaptor sizes: Ø15/23mm, Ø15/28mm, Ø15/34mm, Ø21/23mm, Ø20/23mm, Ø14&15/20mm Assembly Flywheel Threads: Ø6x1.00mm, Ø7x1.00mm, Ø8x1.25mm



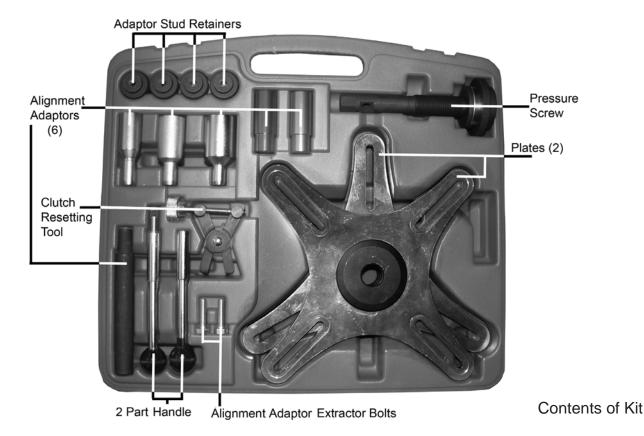





Parts support is available for this product. To obtain a parts listing and/or diagram, please log on to www.sealey.co.uk, email sales@sealey.co.uk or phone 01284 757500.

NOTE: It is our policy to continually improve products and as such we reserve the right to alter data, specifications and component parts without prior notice.

IMPORTANT: No liability is accepted for incorrect use of this product.

WARRANTY: Guarantee is 12 months from purchase date, proof of which will be required for any claim.

INFORMATION: For a copy of our catalogue and latest promotions call us on 01284 757525 and leave your full name, address and postcode.



Sole UK Distributor, Sealey Group, Kempson Way, Suffolk Business Park, Bury St. Edmunds, Suffolk IP32 7AR



01284 757500 01284 703534



www.sealey.co.uk

sales@sealey.co.uk