

POWER BLEEDER™ UNIVERSAL ADAPTOR

1. INTRODUCTION

1.1. INTRODUCTION


VS820UA is used to connect VS820 Power Bleeder to the vehicle master cylinder reservoir and is compatible with a wide range of reservoir designs.

2. SAFETY INSTRUCTIONS

- ❑ **WARNING!** Ensure that Health and Safety, local authority and general workshop practice regulations are adhered to when using tools.
 - x **DO NOT** use tools if damaged.
 - ✓ Maintain tools in good and clean condition for best and safest performance.
 - ✓ Ensure that ignition key is removed, to prevent inadvertent engine cranking.
 - ✓ If the vehicle to be worked on is raised, ensure that it is adequately supported with axle stands or ramps and chocks.
 - ✓ Wear approved eye protection. A full range of personal safety equipment is available from your Sealey dealer.
 - ✓ Wear suitable clothing to avoid snagging. Do not wear jewellery and tie back long hair.
 - ✓ Account for all tools being used and do not leave them on or in the vehicle.
- * **Brake Fluid Precautions**
- ✓ Always read and comply with the warnings on the brake fluid container.
 - ✓ Wear eye protection and keep skin contact to a minimum. If brake fluid enters eyes rinse with plenty of water and seek medical advice. If swallowed seek medical advice immediately.
 - ✓ Brake fluid is flammable - keep away from sources of ignition, including hot surfaces e.g. exhaust manifold.
 - ✓ Brake fluid will damage paintwork. Any spillage should be flushed with water immediately.

3. INSTRUCTIONS

- 3.1. Put the two J-bolts through the holes in the adaptor cap and fit the washers and wing nuts.
- 3.2. Remove the brake fluid reservoir cap and fit the adaptor cap centrally over the reservoir filler neck.
- 3.3. Attach one end of the chain to the hooked end of one of the J-bolts, run the chain under the master cylinder and attach to the second J-bolt.
- 3.4. Tighten the two wing nuts evenly to clamp the adaptor cap onto the reservoir.
- 3.5. Connect the adaptor cap tube to the Power Bleeder tube (remove threaded cap and replace with female threaded hose end fitting, provided) and then follow the Power Bleeder instructions.

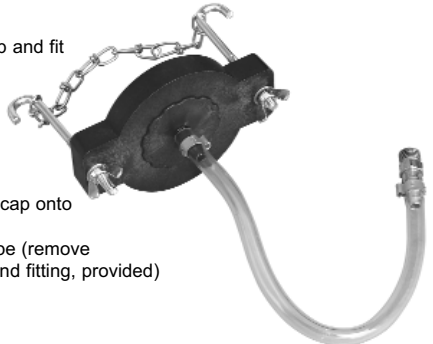

NOTE: It is our policy to continually improve products and as such we reserve the right to alter data, specifications and component parts without prior notice. **IMPORTANT:** No liability is accepted for incorrect use of this equipment. **WARRANTY:** Guarantee is 12 months from purchase date, proof of which will be required for any claim. **INFORMATION:** For a copy of our latest catalogue and promotions call us on 01284 757525 and leave your full name and address, including postcode.