


# NON-STICK COATED BLADE

Non-stick PTFE coat to prevent resin build up and increase sawblade life. Ideal for decking.



## Alternating top bevel grind tooth form (ATB)

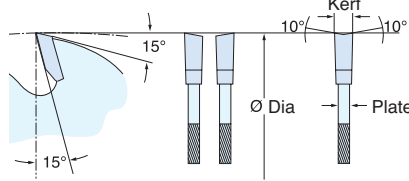

	Dia. inch	Dia. mm	No. of Teeth	Arbor inch	Arbor mm	Kerf inch	Plate inch	Product Ref.
●	7-1/4	184	24	5/8	15.9	0.102	0.067	<b>U*PSB/TC18424</b>


◇ = Dual 5/8" & diamond knockout

# NAIL CUTTING BLADE

Teeth have top and front bevel which allows the blade to cut more quickly through the timber.



## Triple chip grind tooth form (TCG)

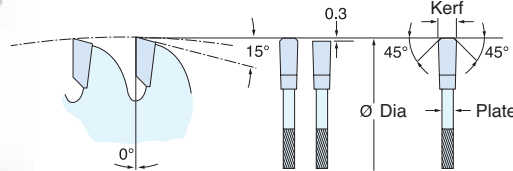


	Dia. inch	Dia. mm	No. of Teeth	Arbor inch	Arbor mm	Kerf inch	Plate inch	Product Ref.
●	7-1/4	184	30	5/8	15.9	0.79	0.059	<b>U*PSB/NC18430</b>

◇ = Dual 5/8" & diamond knockout

## Color Code & Key


### Universal Rip

● **Good Finish** suitable for: Ripping of softwood, hardwood, plywood and exotic timber.




### General Purpose

● **Good Finish** suitable for: Ripping of softwood, hardwood, fiber board, plasterboard, cement bonded board & exotic timber.



### Combination

● **Good Finish** suitable for: Softwood, hardwood, plywood, soft fiber board, exotic timber, cement bonded board and plasterboard.

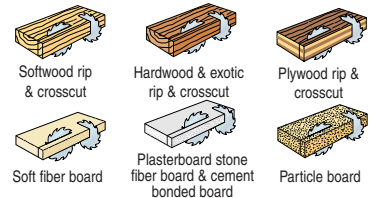

Use Trend Tool & Bit Cleaner to remove resin & pitch build-up. See page 12 for full details.

Ref. **U\*CLEAN/500**

