



RACKING UNIT 200KG CAPACITY PER LEVEL

MODEL NO: **AP7201**

Thank you for purchasing a Sealey product. Manufactured to a high standard, this product will, if used according to these instructions, and properly maintained, give you years of trouble free performance.

IMPORTANT: PLEASE READ THESE INSTRUCTIONS CAREFULLY. NOTE THE SAFE OPERATIONAL REQUIREMENTS, WARNINGS & CAUTIONS. USE THE PRODUCT CORRECTLY AND WITH CARE FOR THE PURPOSE FOR WHICH IT IS INTENDED. FAILURE TO DO SO MAY CAUSE DAMAGE AND/OR PERSONAL INJURY AND WILL INVALIDATE THE WARRANTY. KEEP THESE INSTRUCTIONS SAFE FOR FUTURE USE.



Refer to
instruction
manual

1. SAFETY

- ☐ **WARNING!** Ensure Health & Safety, and local authority regulations are adhered to when assembling and using these racks.
- ✓ Keep the general area clean, uncluttered and ensure there is adequate lighting.
- ✓ Keep children and unauthorised persons away from the area.
- ✗ **DO NOT** use the racks for any purpose other than that for which they are designed.
- ✗ **DO NOT** get the racks wet or use in damp or wet locations or areas where there is condensation.
- ✗ **DO NOT** clean with any solvents which may damage the coated surface.
- ✓ Ensure that the racks are properly assembled before loading them.
- ✓ Load must be evenly distributed.
- ☐ **WARNING!** Racks should be fixed to the wall with suitable fixings.

2. INTRODUCTION

Fully painted steel frame with five MDF shelves. 200kg Capacity per level giving a maximum capacity of 1000kg per rack. Boltless design means no tools required to assemble. Slots together in minutes. 2-Piece uprights allow use as a single bay rack or split into two separate shelf systems or workstations. Can be used in conjunction with Model No. AP7150C Corner Unit and AP7200.

3. SPECIFICATION



Model No:	AP7201
Capacity:	1000kg
Nett Weight:	30kg
Overall Size (W x D x H):	1500 x 410 x 1830mm
Shelf Capacity:	200kg

4. CONTENTS


1	MDF Shelves	X5
2	Brackets 'A'	X10
3	Brackets 'B'	X10
4	Braces 'C'	X10
5	Legs 'D'	X8
6	Connector Pins	X4
7	Foot End Caps	X8

4.1. FIXINGS


A	Wall Fixing (Plasterboard Wall)	X2
B	Wall plug	X2
C	Cross head screw	X2
D	Washer	X2

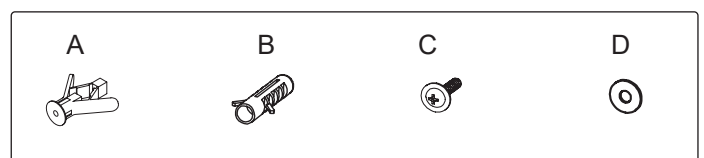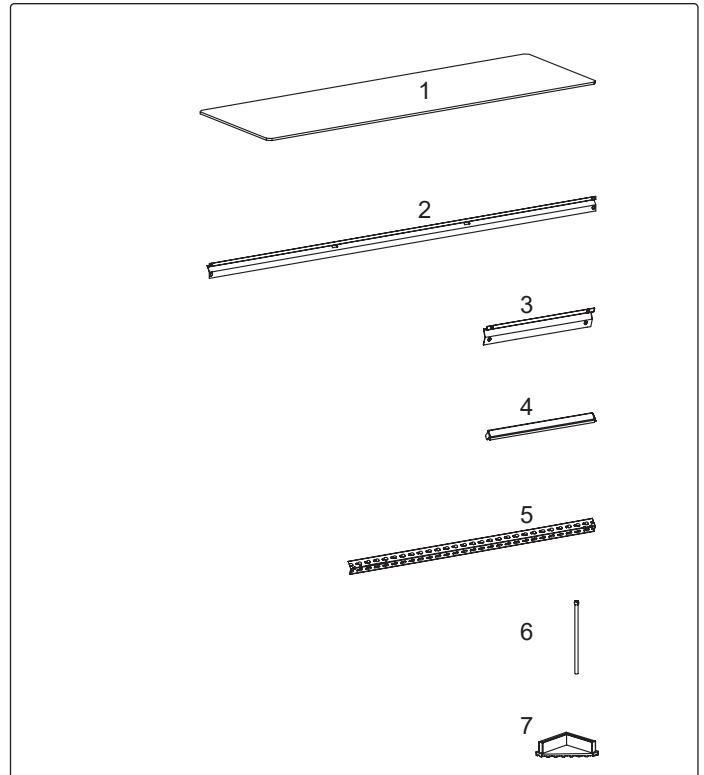


5. ASSEMBLY

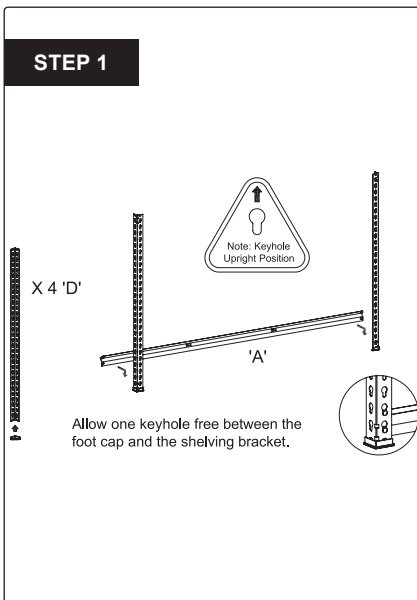

STEP 1

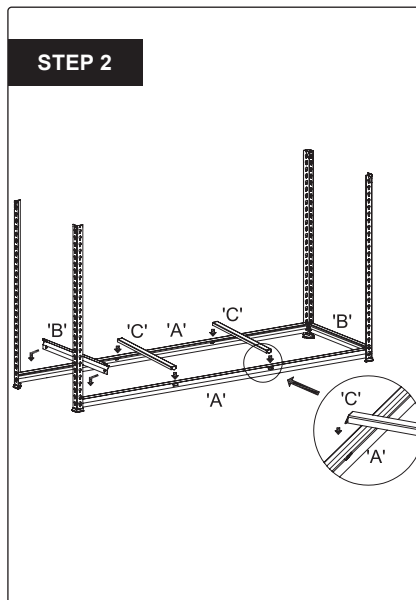

STEP 2

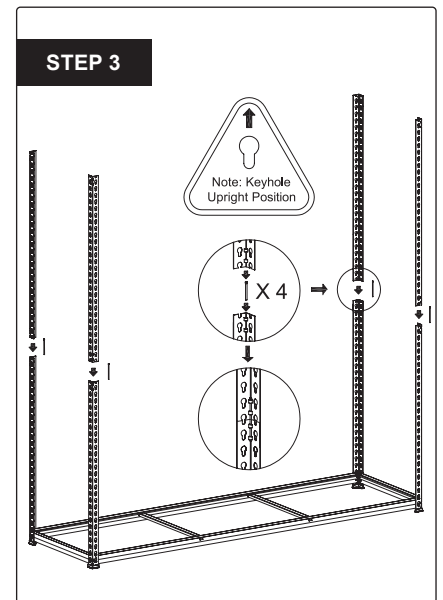

STEP 3

Step 1. ASSEMBLING THE BASE FRAME

Fit the Foot End Caps to the bottom of the Legs (D), ensuring they are positioned correctly. Fit Brackets (A) onto the Legs (D). A rubber mallet can be used to lightly tap the brackets into the keyholes on the legs.

Step 2. FIT THE SIDE BRACKETS


Use Shelf Brackets (B) for the side brackets, using Brackets (A) from Step 1 as a guide for the height. Fit the same Shelf Brackets (B) to the opposite sides, as shown in the diagram.

Step 3. JOIN THE UPPER AND LOWER LEGS


Join the upper and lower Legs (D) using the Connector Pins.

NOTE: The legs are designed to sit directly on top of each other. **DO NOT** overlap them.


HANDY HINT: A flat-head screwdriver can be used to gently tap the Connector Pins into place.

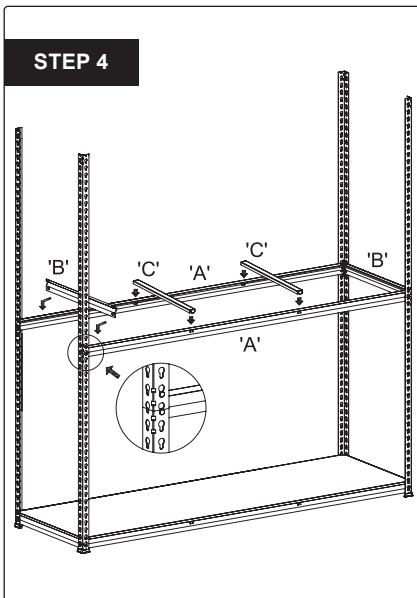

STEP 4

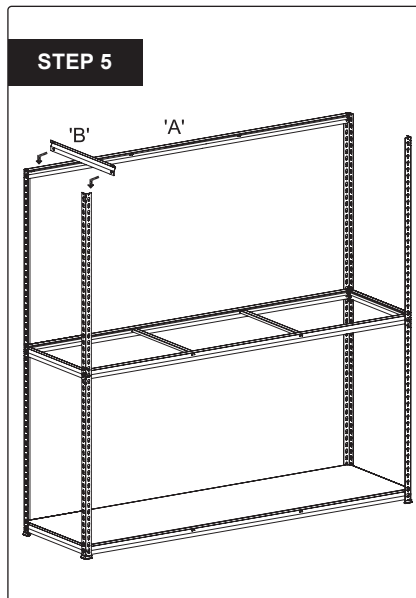

STEP 5

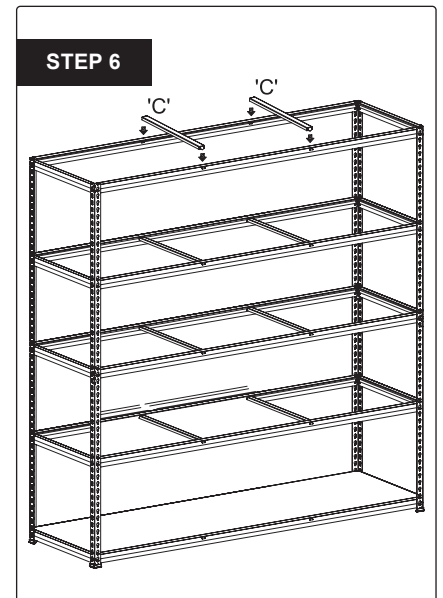

STEP 6

Step 4. FIT THE MDF SHELF

Place the MDF board onto the bottom shelf to minimise buckling. Fit Brackets (B) so that the upper rivets sit on the upper legs and the lower rivets sit on the lower legs. Repeat with Brackets (A), followed by Braces (C), as shown.

Step 5. FIT THE TOP BRACKETS

Fit Brackets (B) and (A) to the top of the Legs (D). **NOTE:** The MDF shelf should sit flush with the top of the Legs (D).

Step 6. FIT THE REMAINING BRACKETS

Fit the remaining Brackets at the desired height. Ensure that Braces (C) are fitted to all shelves.

Step 7. FIT THE MDF SHELVES

Place the MDF boards onto the shelves. Ensure that they sit flush against the edges of the Shelf Brackets.

WARNING! It is strongly recommended that this product is securely anchored. Furniture that tips over can cause serious injury or death. A tip-over prevention kit is supplied with this product to help prevent it from tipping forwards. For your safety, securely fix the product to a wall or other solid structure using the supplied fixings.


IMPORTANT: Regularly check that the wall fixings remain secure. The stability of tall furniture may be affected by thick-pile carpets or uneven floors.

CAUTION: Before fitting the wall fixings, please observe the following:

1. Check for concealed electrical cables, water pipes or gas pipes before drilling into the wall. If you are unsure, seek advice from a qualified tradesperson.


2. Walls are constructed from different materials, such as solid masonry or plasterboard-lined cavity walls. Always use fixings that are suitable for your wall type. If necessary, seek advice from a qualified hardware retailer or tradesperson.

STEP 7

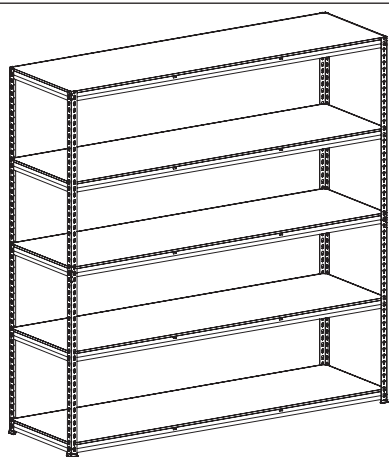


STEP 8

Fixing to Brick/Masonry Wall

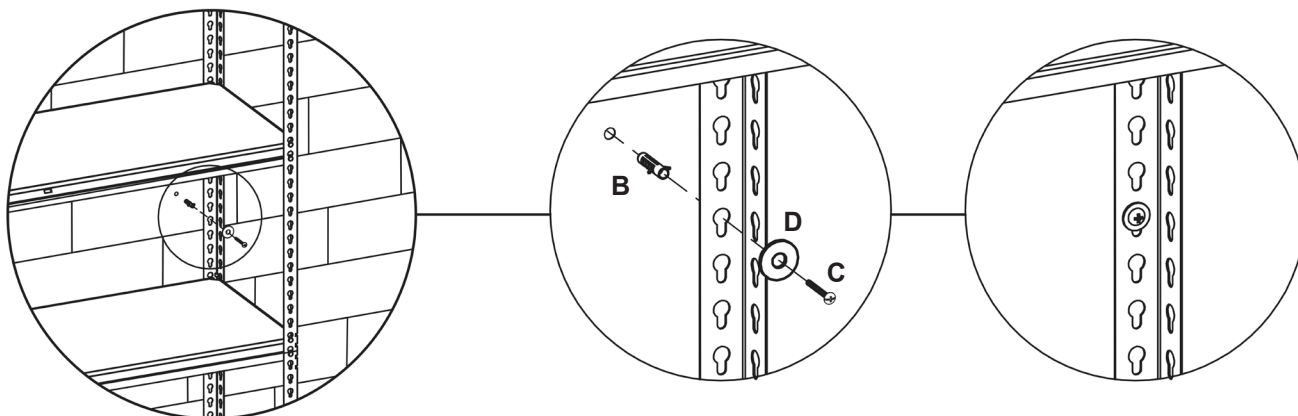

Fixing to a Plasterboard Wall

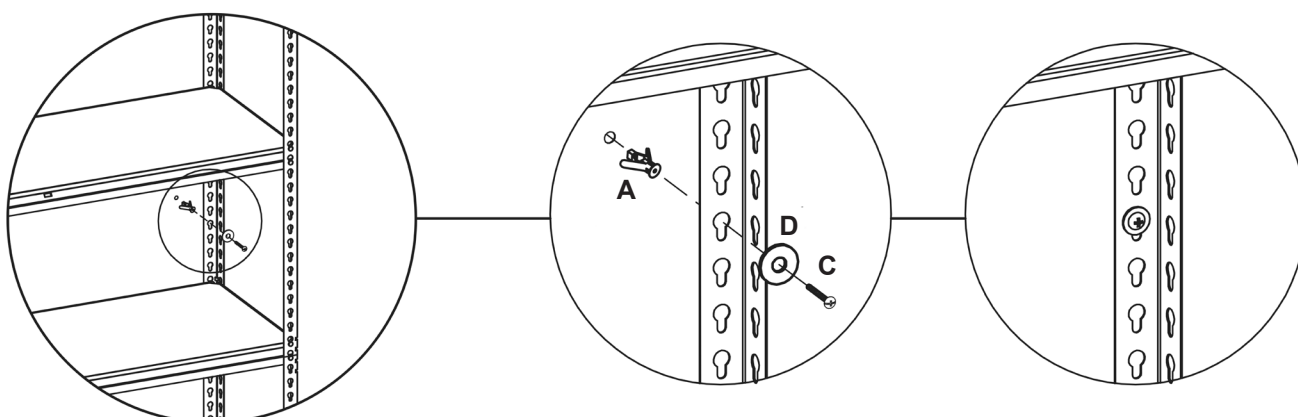

ENVIRONMENT PROTECTION

Recycle unwanted materials instead of disposing of them as waste. All tools, accessories and packaging should be sorted, taken to a recycling centre and disposed of in a manner which is compatible with the environment. When the product becomes completely unserviceable and requires disposal, drain any fluids (if applicable) into approved containers and dispose of the product and fluids according to local regulations.

Note: It is our policy to continually improve products and as such we reserve the right to alter data, specifications and component parts without prior notice.

Important: No Liability is accepted for incorrect use of this product.

Warranty: Guarantee is 12 months from purchase date, proof of which is required for any claim.



REGISTER YOUR PURCHASE HERE

Jack Sealey (EU) Ltd t/a Sealey Group Farney Street, Carrickmacross, Co. Monaghan, A81 PK68 Ireland
Jack Sealey Ltd t/a Sealey Group Kempson Way, Suffolk Business Park, Bury St Edmunds, Suffolk, IP32 7AR UK
Tel: 01284 757500 • Email: sales@sealey.co.uk • Web: www.sealey.co.uk