SUPERLINE PRO® HEAVY-DUTY MODULAR RACKING UNIT WITH 4 MESH SHELVES 600KG CAPACITY PER LEVEL

MODEL NO's: **APMR1.V2**

Thank you for purchasing a Sealey product. Manufactured to a high standard, this product will, if used according to these instructions, and properly maintained, give you years of trouble free performance.

IMPORTANT: PLEASE READ THESE INSTRUCTIONS CAREFULLY. NOTE THE SAFE OPERATIONAL REQUIREMENTS, WARNINGS & CAUTIONS. USE THE PRODUCT CORRECTLY AND WITH CARE FOR THE PURPOSE FOR WHICH IT IS INTENDED. FAILURE TO DO SO MAY CAUSE DAMAGE AND/OR PERSONAL INJURY AND WILL INVALIDATE THE WARRANTY. KEEP THESE INSTRUCTIONS SAFE FOR FUTURE USE.



Refer to instruction manual

1. SAFETY

- ❑ **WARNING!** Ensure Health & Safety, and local authority regulations are adhered to when assembling and using these racks.
- ✓ Keep the general area clean, uncluttered and ensure there is adequate lighting.
- ✓ Keep children and unauthorised persons away from the area.
- × **DO NOT** use the racks for any purpose other than that for which they are designed.
- × **DO NOT** get the racks wet or use in damp or wet locations or areas where there is condensation.
- × **DO NOT** clean with any solvents which may damage the coated surface.
- ✓ Ensure that the racks are properly assembled before loading them.
- ✓ Load must be evenly distributed.
- ❑ **WARNING!** Racks should be fixed to the wall with suitable fixings.

2. INTRODUCTION


Textured powder coat steel frame with four heavy-duty powder coated steel mesh shelves. Industrial structured beams offer added strength with 600kg capacity per level, giving a maximum capacity of 2400kg per rack. Boltless design means no tools required to assemble. Specifically designed and sized drawer units and cupboards available to keep storage tidy, see Model No's APMB1, APMB2, APMB3, APMB4, APMB5, APMR2, APMR3 and APMR4 (sold separately).

3. SPECIFICATION

Model No:	**APMR1.V2**
Capacity:	2400kg
Nett Weight:	43.5kg
Overall Size (W x D x H):	1820 x 540 x 2090mm
Shelf Capacity:	300kg


4. CONTENTS

1	(Part A) Angle Posts	X4
2	(Part B) Long Beams	X8
3	(Part C) Short Beams	X8
4	(Part D) Braces	X8
5	(Part E) Wire Shelving	X4
6	(Part F) Rubber Feet	X4

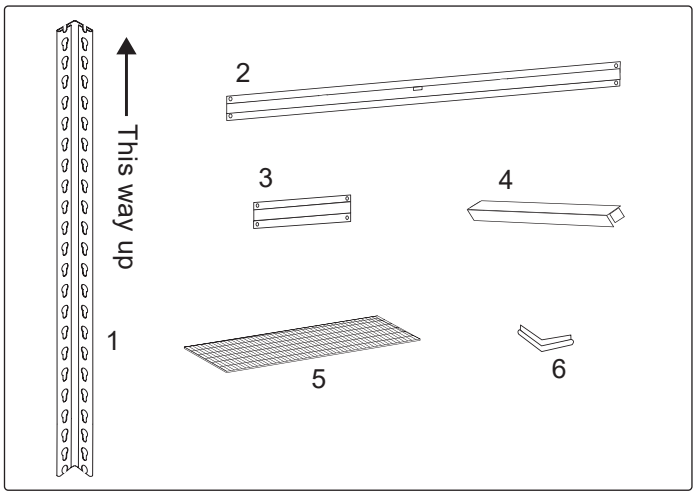

4.1. FIXINGS


A	Wall Fixing (Plasterboard Wall)	X2
B	Wall plug	X2
C	Cross head screw	X2
D	Washer	X2

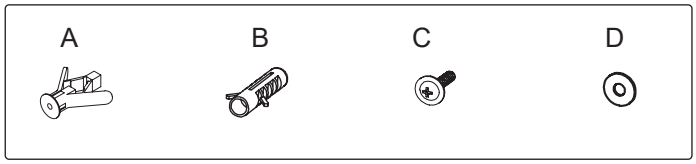


© Jack Sealey Limited

Original Language Version

5. ASSEMBLY

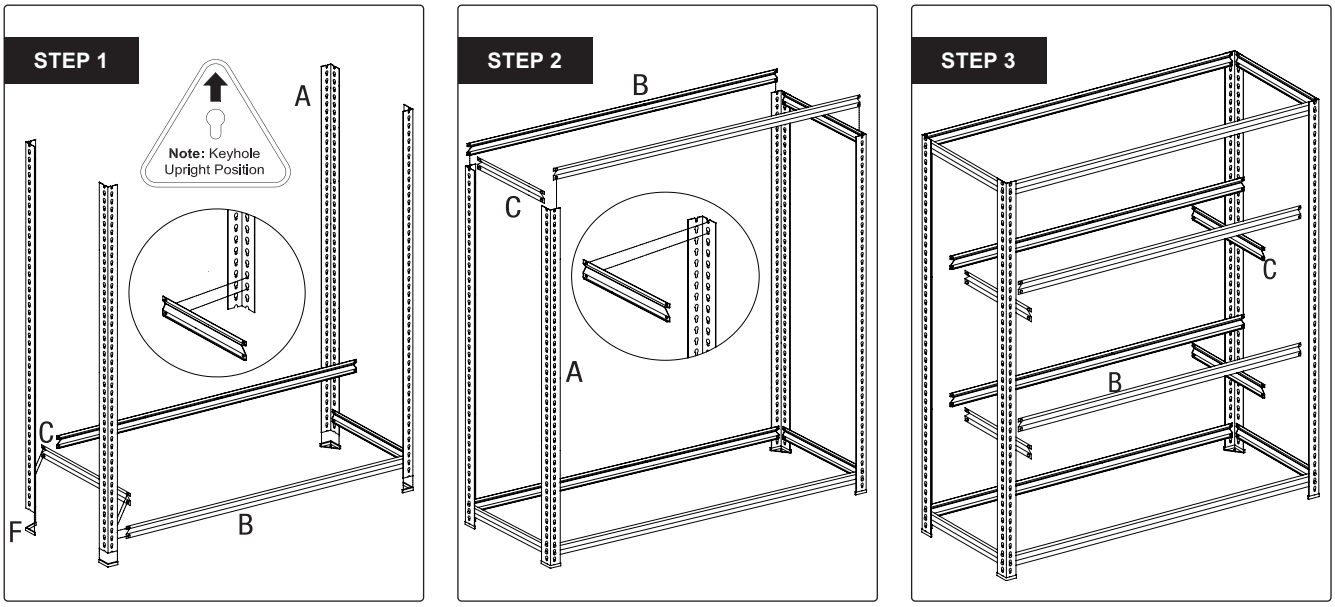

Step 1. **ASSEMBLING THE BASE FRAME**
Fit the Rubber Feet (Part F) to the bottom of the Angle Posts (Part A). Attach the Short Beams (Part C) to the base of the Angle Posts (Part A) as shown. Then attach the Long Beams (Part B) to the opposite keyhole slots (the 2nd and 3rd holes from the base).
NOTE: Ensure the flat edges of the beams face outwards. Secure the rivets into the bottom of the keyhole slots by gently tapping the beams into place using a rubber mallet.
Step 2. **ASSEMBLING THE REMAINING FRAME**
Attach the Short Beams (Part C) to the top of the Angle Posts (Part A) as shown. Then attach the Long Beams (Part B) to the opposite keyhole slots to complete the frame assembly.
NOTE: Ensure the flat edges of the beams face outwards. Secure the rivets into the bottom of the keyhole slots by gently tapping the beams into place using a rubber mallet.
Step 3. **ASSEMBLING THE REMAINING SHELVES**
Attach the remaining Short Beams (Part C) and Long Beams (Part B) at your preferred shelf heights. As before, secure the rivets into the bottom of the keyhole slots by gently tapping the beams into place using a rubber mallet.

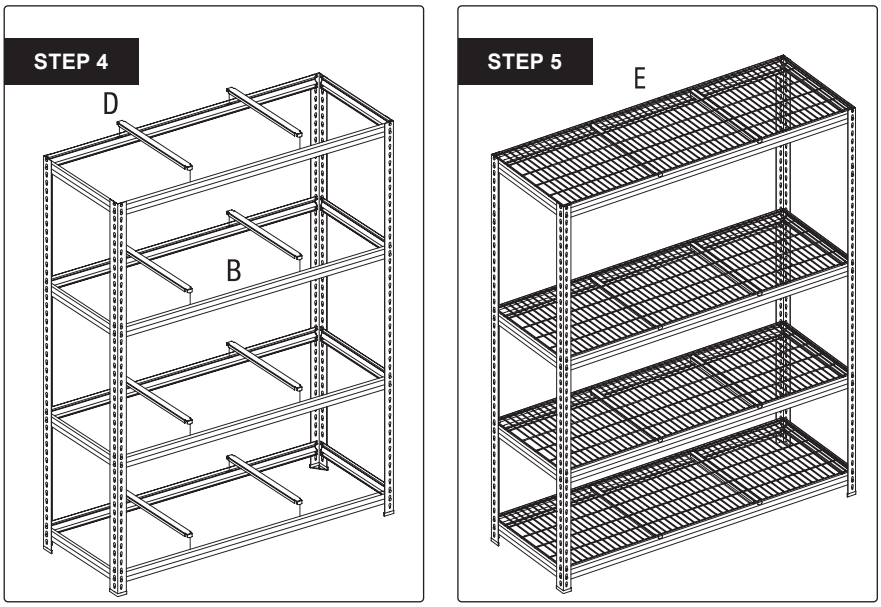

Step 4. **FITTING THE BRACES**
Insert the Braces (Part D) through the holes provided in the Long Beams (Part B) as shown.
Step 5. **FITTING THE WIRE SHELVES**
Place the Wire Shelves (Part E) onto the beams as shown in the illustration. Ensure each shelf is fully seated and securely supported by the beams.


- ❑ **WARNING!** It is strongly recommended that this product is securely anchored. Furniture that tips over can cause serious injury or death. A tip-over prevention kit is supplied with this product to help prevent it from tipping forwards. For your safety, securely fix the product to a wall or other solid structure using the supplied fixings.
  IMPORTANT: Regularly check that the wall fixings remain secure. The stability of tall furniture may be affected by thick-pile carpets or uneven floors.
  CAUTION: Before fitting the wall fixings, please observe the following:
  1. Check for concealed electrical cables, water pipes or gas pipes before drilling into the wall. If you are unsure, seek advice from a qualified tradesperson.

© Jack Sealey Limited


2. Walls are constructed from different materials, such as solid masonry or plasterboard-lined cavity walls. Always use fixings that are suitable for your wall type. If necessary, seek advice from a qualified hardware retailer or tradesperson.

STEP 6

Fixing to Brick/Masonry Wall

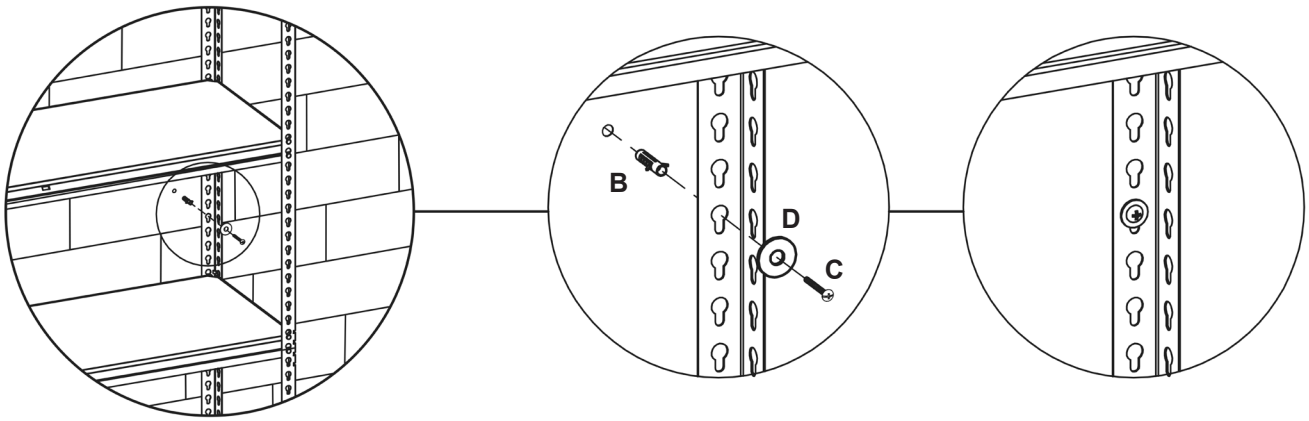

Fixing to a Plasterboard Wall

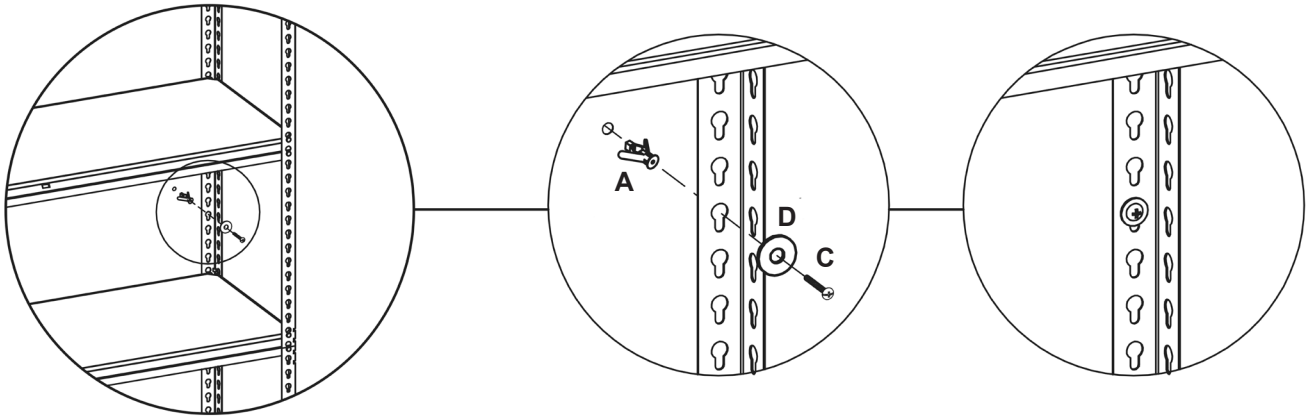

ENVIRONMENT PROTECTION

Recycle unwanted materials instead of disposing of them as waste. All tools, accessories and packaging should be sorted, taken to a recycling centre and disposed of in a manner which is compatible with the environment. When the product becomes completely unserviceable and requires disposal, drain any fluids (if applicable) into approved containers and dispose of the product and fluids according to local regulations.

Note: It is our policy to continually improve products and as such we reserve the right to alter data, specifications and component parts without prior notice.
Important: No Liability is accepted for incorrect use of this product.
Warranty: Guarantee is 60 months from purchase date, proof of which is required for any claim.

REGISTER YOUR PURCHASE HERE

Jack Sealey (EU) Ltd t/a Sealey Group Farney Street, Carrickmacross, Co. Monaghan, A81 PK68 Ireland
Jack Sealey Ltd t/a Sealey Group Kempson Way, Suffolk Business Park, Bury St Edmunds, Suffolk, IP32 7AR UK
Tel: 01284 757500 ▪ **Email:** sales@sealey.co.uk ▪ **Web:** www.sealey.co.uk

© Jack Sealey Limited