

POWER INSTRUCTIONS FOR: Low Voltage PRODUCTS Plug & Socket Model: TR24012/3

Thank you for purchasing a Sealey product. Manufactured to a high standard this product will, if used according to these instructions and properly maintained, give you years of trouble free performance.

■ WARNING! It is the responsibility of the owner and the operator to read, understand and comply with the following:

1.0 ELECTRICAL SAFETY

- This connector has been 11 designed specifically for use with Class II 'double insulated equipment.
- 1.2 The total maximum load must not exceed 10amps (2400watts). Ensure that the correct size cable is used. (1.0 is recommended).
- This connector must not be used with appliances which require an earth connection.
- Do not use this connector where where it may be subject to excessive moisture or the effects of dampness.

IF IN DOUBT CONSULT A **QUALIFIED ELECTRICIAN**

WIRING INSTRUCTIONS 2.0

- 2.1 Remove the fixing nuts and bolts and remove the inner portion of the plug and socket from the outer sleeves.
- 2.2 Prepare cable recommended lengths as shown overleaf.
- 2.3 Insert cable through correct sleeve before making outer

connections. The socket sleeve marked 'CONNECT TO MAINS' must be on the mains supply side. The sleeve marked plua 'CONNECT TO APPLIANCE' must be on the cable from the appliance / equipment.


- Loosen the cord grips and pass the cables through.
- Wire plug and socket terminals as shown overleaf and tighten screws.
- Tighten cord grip securely over outer cable sheath.
- 2.7 Slide the outer sleeves over both plug and socket and secure with the nuts & bolts.

NOTE: It is our policy to continually improve products and as such we reserve the right to alter data, specifications and component parts without prior notice.

IMPORTANT: No liability is accepted for incorrect use of this product.

WARRANTY: Guarantee is 12 months from purchase date, proof of which will be required for any claim.

INFORMATION: For a copy of our latest catalogue call us on 01284 757525.

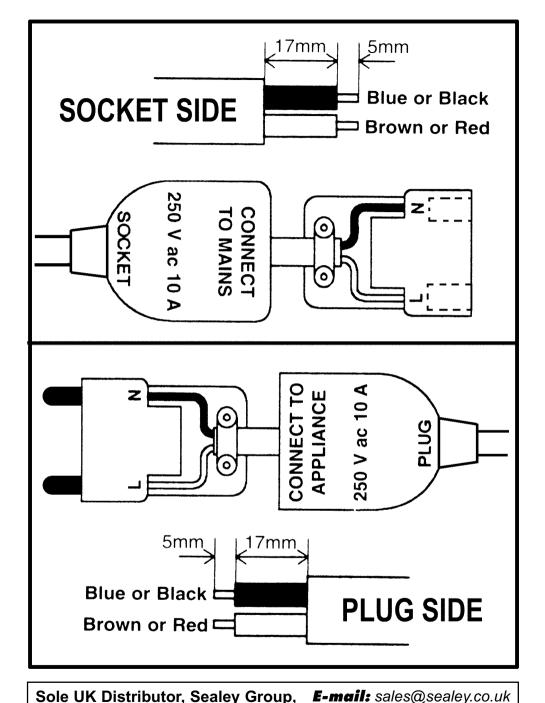

Sole UK Distributor, Sealey Group, Bury St. Edmunds, Suffolk.

Web address: www.sealey.co.uk



a 01284 757500



01284 703534