

Thank you for purchasing a Sealey product. Manufactured to a high standard this product will, if used according to these instructions and properly maintained, give you years of trouble free performance.

! IMPORTANT: PLEASE READ THESE INSTRUCTIONS CAREFULLY. NOTE THE SAFE OPERATIONAL REQUIREMENTS, WARNINGS AND CAUTIONS. USE THIS PRODUCT CORRECTLY AND WITH CARE FOR THE PURPOSE FOR WHICH IT IS INTENDED. FAILURE TO DO SO MAY CAUSE DAMAGE AND/OR PERSONAL INJURY, AND WILL INVALIDATE THE WARRANTY. PLEASE KEEP INSTRUCTIONS SAFE FOR FUTURE USE.

1. SAFETY INSTRUCTIONS

- ✓ Maintain the dispenser in good condition. Replace or repair damaged parts. *Use recommended parts only. Unauthorised parts may be dangerous and will invalidate the warranty.*
- ✓ Keep the dispenser clean for best and safest performance.
- ✓ Ensure the workpiece is correctly held or secured before commencing work.
- x DO NOT use the dispenser for any purpose other than for which it is designed.
- x DO NOT operate the dispenser if any parts are missing as this may cause failure and/or possible personal injury.
- x DO NOT attempt to use on humans or animals.
- x DO NOT use for heavy loads over 20lbs.
- ✓ When not in use store in a safe, dry, childproof area.

2. CONTENTS

Suitable for strapping anything from small cables to large boxes. Fast, efficient with no more waste. Built-in cutter, automatically cuts tie to required length after tightening. Comes complete with a tie reel and clips.

Contents	CT01	CT01R
Gun	1	0
Clips	100	200
Tie	10mtr	12mtr



3. ASSEMBLY INSTRUCTIONS

3.1. Loading Clips.

- 3.1.1 Remove the spring loader by pressing both sides and pulling apart gently (Fig. A).
- 3.1.2 Ensure the clip stick is in an upright position, with the arrows on clips facing towards the dispenser.
- 3.1.3 Insert the clips all the way into the dispenser (Fig. B), withdraw the stick and discard, the clips will remain in the dispenser.
- 3.1.4 Push the spring loader back into its original position.

NOTE: Only fit the contents of one stick into the dispenser, if the dispenser is overloaded it will jam. If this occurs push the cutter (Fig. A) to eject some of the clips.

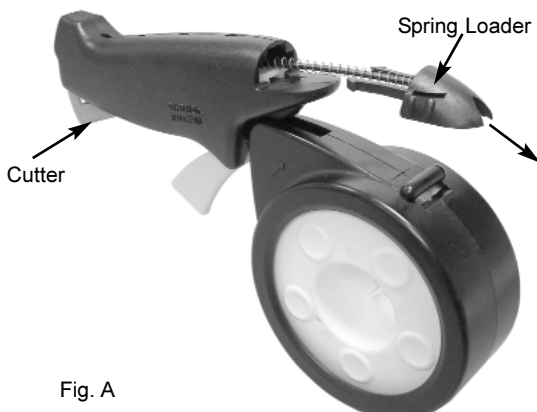


Fig. A

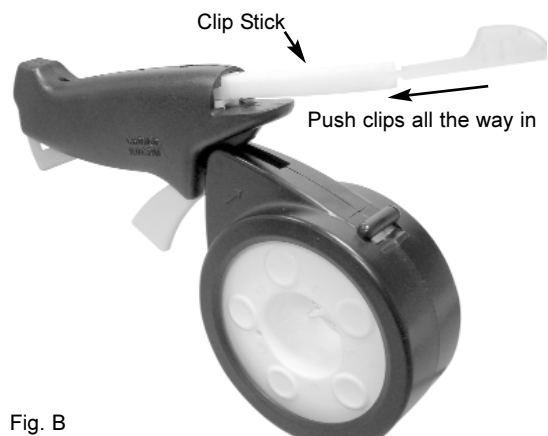


Fig. B

3.2. Attaching & Removing Dispenser to Tie Case

3.2.1 Remove the dispenser from case by gently pulling in the opposite direction (Fig. C).

3.2.2 Attach back together by pushing towards each other until you hear a click (Fig. D). Make sure the arrow on the case is facing away from the trigger.

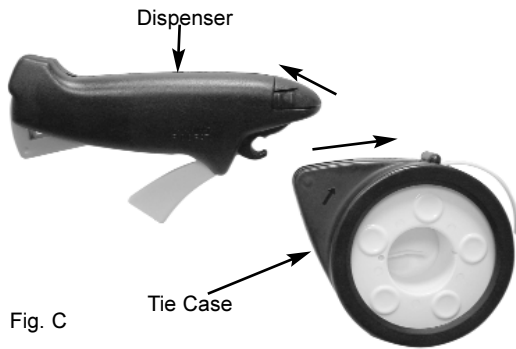


Fig. C

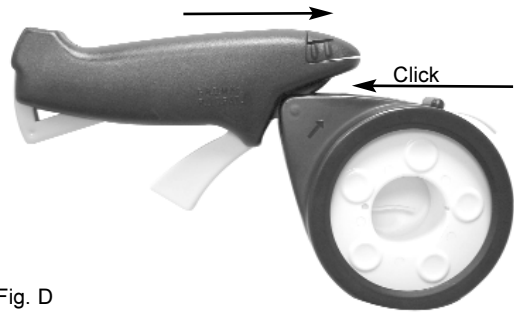


Fig. D

3.3. Loading Spool To Tie Case

3.3.1 Remove case from dispenser.

3.3.2 Open case by gently pulling apart at the arrows. Place tie spool in the side of the case that is marked with the word "DOWN" (Fig. E).

3.3.3 Insert tie through the slot in the case before closing firmly. Make sure that the cable is not twisted.

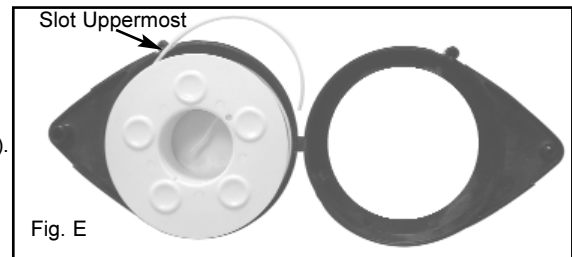


Fig. E

3.4. Loading Tie to Dispenser

3.4.1 Attach the case to the dispenser and feed the tie into the opening of the dispenser (Fig. F), until it protrudes from the opening in the cutter (Fig. G).

3.4.2 The tip of the tie must be straight with the smooth surface facing upwards.

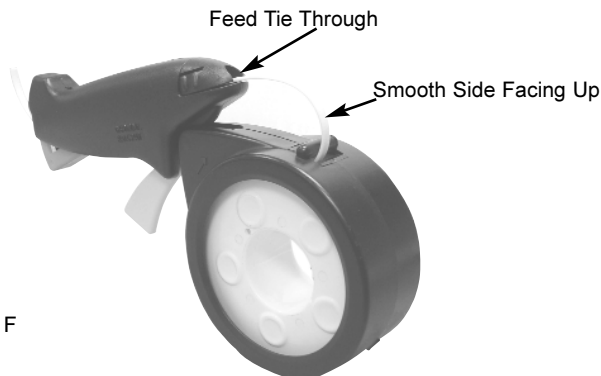


Fig. F



Fig. G

3.5. Using Cable Tie Dispenser

3.5.1 Pull tie to desired length (Fig. H).

3.5.2 Wrap the tie around the object to be secured from the bottom to top (Fig. I).

3.5.3 Push the tip of the cable back into the cutter until you hear a clicking sound (Fig. J).

3.5.4 Tighten the tie by squeezing the trigger. When the desired tension is achieved cut the tie by squeezing the cutter trigger.



Fig. H

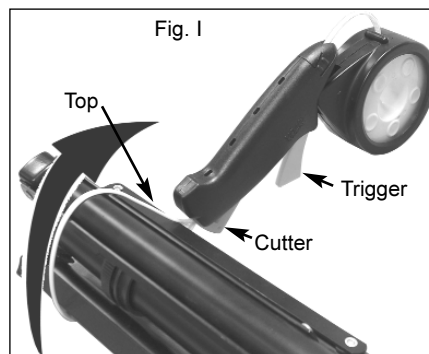


Fig. I




Fig. J

NOTE: It is our policy to continually improve products and as such we reserve the right to alter data, specifications and component parts without prior notice.
IMPORTANT: No liability is accepted for incorrect use of product. **WARRANTY:** Guarantee is 12 months from purchase date, proof of which will be required for any claim. **INFORMATION:** For a copy of our latest catalogue and promotions call us on 01284 757525 and leave your full name and address, including postcode.



Sole UK Distributor
Sealey Group,
Bury St. Edmunds, Suffolk.

E-mail: sales@sealey.co.uk

01284 703534

Web www.sealey.co.uk

01284 757500