DRAINER GROOVE PRO JIG FRAME Patent No. GB1718517.4




An X and Y-axis routing jig that allows different drainer grooves to be routed in solid timber and solid surface worktops when used with accessory inner plates.

- Outer frame has 0.5° degree fall.
- X and Y-axis ski and carriage allows forward & back and side to side movement to allow surfacing for recessed draining board design.
- · Router carriage has hole to accept 30mm quide bush and can be locked to allow parallel groove routing for standard drainer grooves.
- Made from 12mm thick hard-wearing machined high pressure laminate.
- Use with a router with 30mm guide bush fitted and suitable cutter.
- Five accessory inner plates available to give various groove effects, straight slot, straight fan, curved fan, lightning fan and hot rod.
- Router carriage can also be used for surfacing applications.
- Outer frame has index holes at 50mm centres to restrict length of slots and includes two index pins.


DG/PRO £232.34

Size: 600 x 600 x 12mm, weight 4kg.

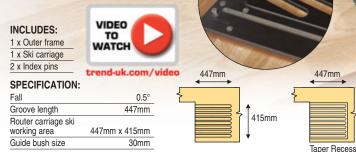

DRAINER GROOVE PRO ACCESSORY INNER PLATES

Sold separately. Router carriage not used when inner templates are fitted.

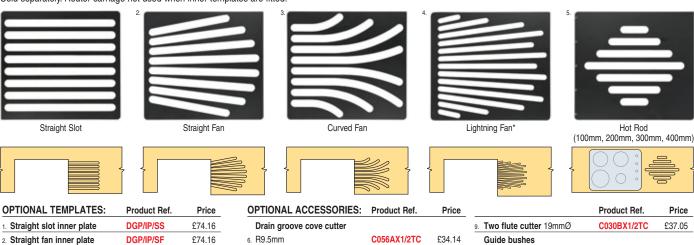

415mm

- 3. Curved fan inner plate DGP/IP/CF £74.16 £74.16 4. Lightning fan inner plate* DGP/IP/LF 5. Hot rod inner plate DGP/IP/HR £74.16
- Requires 20mm guide bush



trend 168

Hot rod cove cutter

7. R6mm (12mmØ hot rods)

8. R6.35mm (12.7mmØ hot rods)







Taper Recess



	Product Ref.	Price
9. Two flute cutter 19mmØ	C030BX1/2TC	£37.05
Guide bushes		
10. 30mm	GB30	£9.14
11. 20mm	GB20	£9.14
12. F Clamps	FC/200	£16.03
13. Carry case	CASE/DG	£34.10
0		

0.5

£34.14 £29.69 C053CX1/2TC £30.75 C054AX1/2TC