


# KITCHEN COUNTERTOP JIG

Designed to enable all 1/2" shank plunge routers to cut precise butt & scribe joints in European Style countertops. Cuts countertops from 20" to 25-5/8" wide, with Peninsular cut.

- A single male and female template in 5/8" solid laminate.
- Two apertures for panel bolt recess to suit both plastic and metal ended connecting bolts.
- Three alloy location bushes and width setting stop.
- Cuts out of square joints (max. 3°).
- TCT router bit, 1/2" diameter with 1/2" shank included Ref. U\*C153DX1/2TC.



Router not included.

**NEW**

ROUTING JIGS & ACCESSORIES



## Combi Jig Features:

- Machined from hard wearing solid laminate.
- Will produce a joint in 15 minutes including setting-up time.
- Out-of-square joints can be accommodated.
- Facilities to cut various widths of board and thicknesses up to 1-1/2".
- Integral panel bolt connector recessing template with easy spanner access.
- Width setting stop for accurate positioning.
- Supplied with clear and comprehensive instructions for use.

## Jig Requires:

- A portable plunge router with 1/2" shank capacity and minimum 1.7HP.
- Two 4" throat clamps.

## Product Reference:

**U\*COMBI66**

## Includes:

- 3 x Bushes
- 1 x Width Setting Stop
- 1 x 1/2" Shank TCT 1/2" Ø Router Bit
- 1 x 1-3/16" Screw-on Style Guide Bush

## Replacement Part:

### Router Bit

1/2" Ø straight TCT router bit for use with combi jig.  
**U\*C153DX1/2TC**

**Screw-on Style Guide Bush 1-3/16"**  
**U\*GB/US/30**

## Optional Accessories:

### Metal Ended Worktop Connectors

Panel bolt connectors to connect worktop joint together. 6" overall length.  
**U\*PC/10/M** (pack of 10)

### F Clamp (4" throat)

Quick action gripper clamps (two required).  
**U\*FC/200**

### Biscuits

Biscuits size No.20.  
**U\*BSC/20/100** (qty 100)

### Bush

**U\*CJ/BUSH**

### Carry Case

Hard wearing carry case to protect jig.  
**U\*CASE/65**


### Guide Bush 1-3/16"

Euro Style.  
**U\*GB30**

### Universal Sub-Base

Certain makes and models of router require a Unibase to accept the Euro Style guide bushes.  
**U\*UNIBASE**

## 4 Functions:

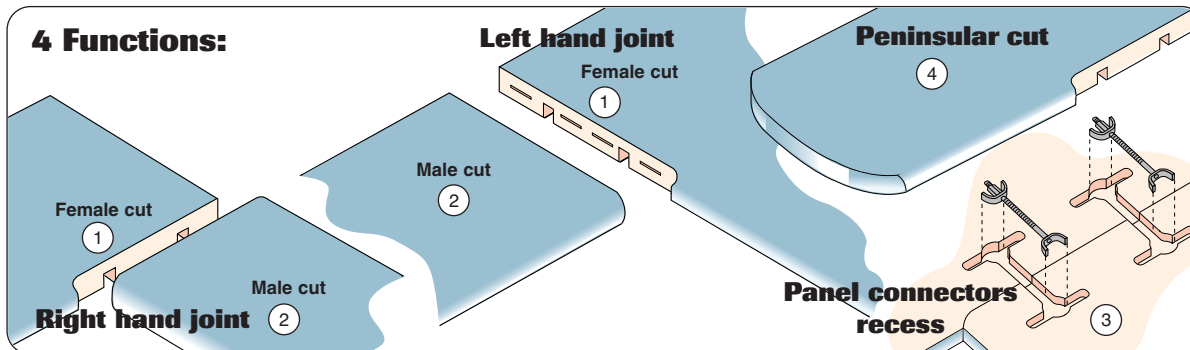

## 4 functions:

- 1 Female cut
- 2 Male cut
- 3 Bolt recess
- 4 Curved Peninsular



**Compatibility**

[www.trend-usa.com/compatibility](http://www.trend-usa.com/compatibility)