


TRADE HINGE JIG

Trade two piece hinge jig with adjustable apertures to recess hinges in doors and frames with a portable router. Constructed from 12mm phenolic plastic material.

- Two part jig with adjustable apertures for different hinge lengths.
- Quick and easy to set-up as the hinge is used as the pattern.
- Clean and accurate recesses are achieved every time.
- Hard wearing 12mm thick phenolic plastic.
- One setting for door and frame. No need to adjust for repeated doors.
- Suitable for internal timber based doors and frames, with separate stops or maximum 11mm stop.
- Requires a 1/4" collet portable plunge router.
- Includes hex key, guide bush, bradawls and carry case.

H/JIG/B (two piece) £222.79

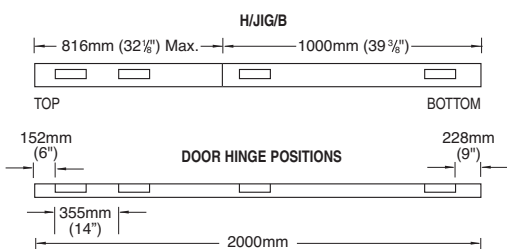

FEATURES:

- With adjustable apertures.
- For separate or 11mm thick fixed stops.
- Also suitable for fire doors and frames with separate stops.



COMPATIBILITY
www.trend-uk.com/compatibility

CORNER CHISEL

For squaring hinge & lock face-plate recesses.

- High Speed Steel anvil for long life.
- Locates in the rounded corner of the routed recess.
- One square blow with a hammer to square corners.
- Can be used with Trend Hinge Jig & Lock Jigs.

C/CHISEL £15.76



INCLUDES:

- 1 x T-handle hex key
- 3 x Bradawls with spacers
- 1 x 16mm guided bush
- 1 x Fabric carry case



SPECIFICATION:

Hinge sizes possible

Length min.	2" (50mm)
Length max.	5" (127mm)
Width min.	3/8" (9.5mm)
Width max.	1-3/8" (35mm)

Door sizes possible

Height min.	6' 5" (1955mm)
Height max.	6' 10" (2100mm)*
Thickness min.	5/8" (16mm)
Thickness max.	2" (51mm)

* Please note for doors over 2000mm the bottom hinge will be higher than 9" up.

OPTIONAL ACCESSORIES:

	Product Ref.	Price
1. Universal sub-base	UNIBASE	£20.51
2. Professional 12mmØ long reach cutter	3/8LX1/4TC	£30.30
CraftPro 12mmØ long reach cutter	C019AX1/4TC	£20.25
3. T4 guide bush 16mmØ x 10mm	GB/T4/160	£11.92
4. Low profile architrave bush kit	HJ/1	£12.59



Certain makes & models of router including the T4 will require a Unibase to accept the guide bushes. The T4 alternatively can use Ref. GB/T4/160 guide bush.



ROUTER CUTTERS

Shank mounted leading edge, to stop door jamb. See page 77 for full details.

Product Refs.

C214
C214A

