


# baridi

---

## Baridi 60cm Dual zone Wine Cooler 40 Bottle Under Counter Freestanding Fridge

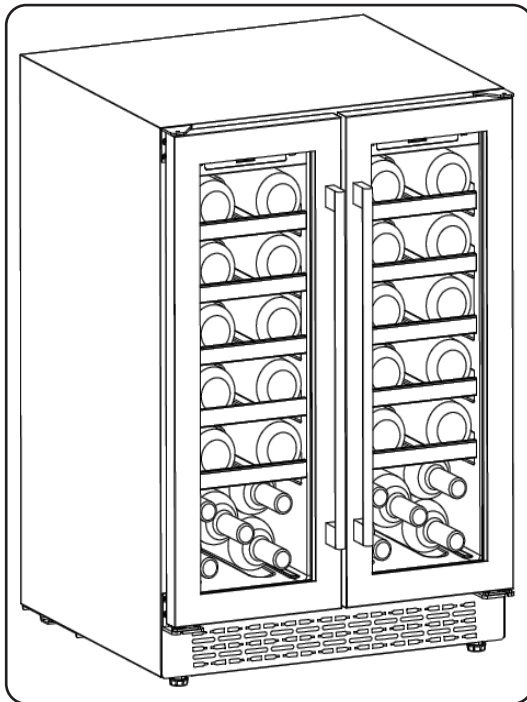

### Model No. DH96

Thank you for purchasing a Baridi product from the Dellonda range. Manufactured to a high standard, this product will, if used according to these instructions, and properly maintained, give you years of trouble free performance.

## Important Information

Please read these instructions carefully and note any safe operational requirements, warnings & cautions. Use the product correctly and with care for the purpose for which it is intended. Failure to do so may cause damage and/or personal injury and will invalidate the warranty. Keep these instructions safe for future use.



Refer to  
instructions




Indoor use  
only

### ELECTRICAL SAFETY

- **WARNING!** It is the user's responsibility to check the following:
- Check all electrical equipment and appliances to ensure that they are safe before using. Inspect power supply leads, plugs and all electrical connections for wear and damage. Del that an RCD (Residual Current Device) is used with all electrical products. You may obtain an RCD by contacting your local domestic stockist. If the product is used in the course of business duties, it must be maintained in a safe condition and routinely PAT (Portable Appliance Test) tested.
- Electrical safety information: It is important that the following information is read and understood.
- Ensure that the insulation on all cables and on the appliance is safe before connecting it to the power supply.
- Regularly inspect power supply cables and plugs for wear or damage and check all connections to ensure that they are secure.
- Important: Ensure that the voltage rating on the appliance suits the power supply to be used and that the plug is fitted with the correct fuse - see fuse rating in these instructions.
- DO NOT pull or carry the appliance by the power cable.
- DO NOT pull the plug from the socket by the cable.
- DO NOT use worn or damaged cables, plugs or connectors.
- Ensure that any faulty item is repaired or replaced immediately by a qualified electrician.
- This product is fitted with a BS1363/A 13 Amp
- 3 pin plug. If the cable or plug is damaged during use, switch off the electricity supply

and remove from use. Ensure that repairs are carried out by a qualified electrician.

- Replace a damaged plug with a BS1363/A 13 amp 3 pin plug. If in doubt contact a qualified electrician.

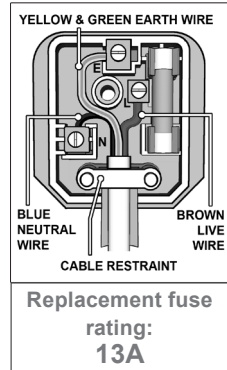

- A) Connect the GREEN/YELLOW earth wire to the earth terminal 'E'.
- B) Connect the BROWN live wire to the live terminal 'L'.
- C) Connect the BLUE neutral wire to the neutral terminal 'N'.

- Ensure that the cable outer sheath extends inside the cable restraint and that the restraint is tight.
- Dellonda recommend that repairs are carried out by a qualified electrician.
- **GENERAL SAFETY**
- DO NOT store explosive substances such as aerosol cans with a flammable propellant in this appliance.
- **WARNING:** Ensure the supply cord is not trapped or damaged.
- **WARNING:** DO NOT locate multiple portable socket-outlets or portable power supplies at the rear of the appliance.
- This appliance is intended to be used in household and similar applications such as staff kitchen areas in shops, offices and other working environments; holiday homes, hotels and other residential settings; and catering and similar non-retail applications.

- This appliance can be used by children aged from 8 years and above and persons with reduced physical, sensory or mental capabilities or lack of knowledge and experience if they have been given supervision or instruction concerning the use of the appliance in a safe way and understand the hazards involved. Children shall not play with the appliance. Cleaning and user maintenance shall not be made by children without supervision.

## • INTRODUCTION

- Add style to your kitchen with this 60cm slim built dual zone-under wine cooler! Fits under standard height worktops and door at the perfect height to sit above standard height kick plates. Dual cooling zones with digital temperature control between 5-20°C allowing you to chill up to 40 bottles of wine to the perfect temperature. Stylish stainless steel door handle, wooden shelves and internal LED light. Super quiet compressor cooling with a noise level of just 41dB.

## • SPECIFICATION

Model no: DH96

Capacity: 40 bottles

Max. bottle height: 300mm

Volume: 112L

Temperature range: 5 -20°C

Rated Current: 0.8A

Voltage: 230V


Frequency: 50Hz

Energy: efficiency class: G

Noise level: 41dB

Dimensions (WxDxH): 595 x 570 x 825mm

## • ASSEMBLY

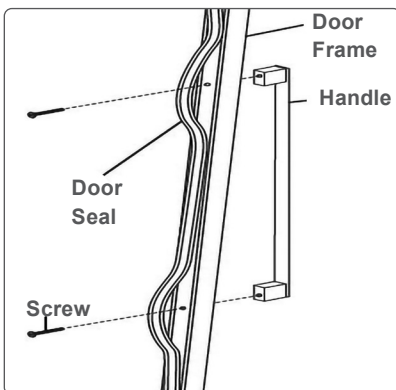

- The door handles are delivered separately.
- On the door interior, gently and carefully pull out the door seal to expose the mounting holes for the handle.
- Align the holes in the handle with the holes in the door frame.
- Insert the screws supplied and tighten using a cross head screw driver (not supplied).
- Press the door seal back in place, ensuring the the seal is in full contact with the door.

## • INSTALLATION

- The unit is designed to be free-standing. Ventilation space required is minimum width 605mm, depth 575mm and height 870mm.
- This will maximise the efficiency, performance and life of the fridge and also ensure that there is sufficient space for the hinges to operate effectively.
- DO NOT locate the unit in a damp or moist location.
- DO NOT cover the grill in the base.
- DO NOT locate the unit in direct sunlight.
- Ensure that the floor surface is strong and stable enough to support the unit when it is fully loaded.
- Level the unit when in location by using the adjustable levelling feet in each corner.
- Once in position allow the unit to rest for an hour before turning it on.
- Allow the unit 2 - 3 hours to reach set temperature after switching on before placing any items in the compartment.


## • OPERATION



- To lock/unlock the key pad for use, press both keys simultaneously and hold for 3 seconds.



- To turn the unit on/off, press . Press for 3 seconds and the unit will go into standby mode. Press for another 3 seconds and the unit will return to normal working.
- To turn the light on and off press . In stand by mode the key is invalid.
- Press the up button once and the display panel will show the current set temperature. Each press of the up button will increase the set temperature by 1°C.

- After 5 seconds the flashing will stop and the temperature will be saved. The display will then show the actual temperature inside the unit.
- Press the down button once  and the display panel will show the current set temperature. Pressing the button will decrease the set temperature by 1°C. After 5 seconds the flashing will stop and the temperature will be saved. The display will then show the actual temperature inside the unit.
- To switch the display from Fahrenheit to Celsius press both keys for 3 seconds



- **MAINTENANCE**
- Remove the power plug from the supply when performing cleaning or maintenance.
- DO NOT use abrasive or chemical cleaning materials on any surface of the unit.
- Wipe interior and exterior surfaces with a damp cloth and dry thoroughly with a clean dry cloth.
- For more soiled surfaces use a neutral detergent, wipe down with a clean damp cloth and dry thoroughly with a clean dry cloth.

## Troubleshooting

| Symptom                                       | Solution   |
|---|--|
| Unit does not operate.                        | Not plugged in.<br>Fuse/circuit breaker failure.   |
| Turns on and off frequently.<br>Poor cooling. | Room temperature higher than normal.<br>Door opened too often.<br>Door not properly closed.<br>Temperature control incorrectly set.<br>Door gasket not sealing.<br>Not enough space around unit. |
| Vibrations                                    | Check to assure unit is level.   |
| Noisy unit                                    | Contraction/expansion of panels.<br>Unit not level.<br>Check fan operation.<br>Check heat pump.  |
| Door will not close properly                  | Unit not level.<br>Gasket distorted.<br>Internals out of position.   |



### Environment Protection, Waste Electrical and Waste Electronic Equipment Regulations (WEEE)



Recycle unwanted packaging materials. When this product is no longer required, or has reached the end of its useful life, please dispose of in an environmentally friendly way.

Drain any fluids (if applicable) into approved containers, in accordance with local waste regulations. It is our policy to continually improve products and we reserve the right to alter data, specifications and parts without prior notice. No liability is accepted for incorrect use of this product. Guarantee is 12 months from purchase date, proof of which is required for any claim.

### Dellonda Limited, Sole UK Distributor of Baridi

Kempson Way, Suffolk Business Park, Bury St Edmunds, Suffolk. IP32 7AR



01284 757575



support@dellonda.co.uk



www.dellonda.co.uk

