

# 3KW INDUSTRIAL FAN HEATER WITH 2 HEAT SETTINGS

**MODEL NO: EH3001.V2** 

Thank you for purchasing a Sealey product. Manufactured to a high standard, this product will, if used according to these instructions, and properly maintained, give you years of trouble free performance.

IMPORTANT: PLEASE READ THESE INSTRUCTIONS CAREFULLY. NOTE THE SAFE OPERATIONAL REQUIREMENTS, WARNINGS & CAUTIONS. USE THE PRODUCT CORRECTLY AND WITH CARE FOR THE PURPOSE FOR WHICH IT IS INTENDED. FAILURE TO DO SO MAY CAUSE DAMAGE AND/OR PERSONAL INJURY AND WILL INVALIDATE THE WARRANTY, KEEP THESE INSTRUCTIONS SAFE FOR FUTURE USE.







Refer to Instruction Manual

Indoor Use Only

Do Not Cover

This product is only suitable for well insulated areas or occasional use.

## 1. SAFETY

#### 1.1. ELECTRICAL SAFETY

- **WARNING!** It is the user's responsibility to check the following:
- Check all electrical equipment and appliances to ensure that they are safe before using. Inspect power supply leads, plugs and all electrical connections for wear and damage. Sealey recommend that an RCD (Residual Current Device) is used with all electrical products.
  Electrical safety information. It is important that the following information is read and understood:
- Ensure that the insulation on all cables and on the appliance is safe before connecting it to the power supply.
- Regularly inspect power supply cables and plugs for wear or damage and check all connections to ensure that they are secure.
  Important: Ensure that the voltage rating on the appliance suits the power supply to be used and that the plug is fitted with the correct fuse.
- **DO NOT** pull or carry the appliance by the power cable.
- DO NOT pull the plug from the socket by the cable.
- **DO NOT** use worn or damaged cables, plugs or connectors. Ensure that any faulty item is repaired or is replaced immediately by a

If the cable or plug is damaged during use, switch off the electricity supply and remove from use.

### Ensure that repairs are carried out by a qualified electrician.

If an extension reel is used it should be as short as possible and fully unwound before connection. A reel with an RCD fitted is preferred since any appliance plugged into it will be protected. The cable core section is important and should be at least 1.5mm², but to be absolutely sure that the capacity of the reel is suitable for this product and for others which may be used in the other output sockets, we recommend the use of 2.5mm² section cable.

#### 1.2. GENERAL SAFETY

- □ **WARNING!** The appliance shall be disconnected from its power source during service and when replacing parts and, if the removal of the plug is foreseen, it shall be clearly indicated that the removal of the plug has to be such that an operator can check from any of the points to which they have access that the plug remains removed.
- □ **WARNING: DO NOT** use this heater in small rooms when they are occupied by persons not capable of leaving the room on their own, unless constant supervision is provided.
- ✓ Servicing or maintenance must only be carried out by an authorised service agent.
- Check that the heater is in sound condition and good working order. Take immediate action to repair or replace damaged parts.
- ✓ Use recommended parts only. Unapproved parts may be dangerous and will invalidate the warranty.
- **DO NOT** attempt to repair a damaged heater, contact an authorised service agent.
- □ **WARNING!** In order to avoid overheating, **DO NOT** cover the heater.

#### 1.3. POSITIONING OF HEATER

- □ WARNING: To reduce the risk of fire, keep textiles, curtains, or any flammable material a min. distance of 1m from the air outlet.
- □ WARNING! DO NOT use the heater near flammable material, liquids, solids, gases or compressed gas cylinders etc.
- Use this heater on a horizontal and stable surface, or fix it to a wall as applicable.
- DO NOT use this heater in the immediate surroundings of a bath, a shower or a swimming pool.
- **DO NOT** place the heater up against any surface such as a wall, door or furniture etc.
- **DO NOT** place the heater immediately below any electrical outlet.
- **DO NOT** place the heater on a raised surface or anywhere where it could topple over.
- DO NOT get the heater wet or use in areas of high condensation.
- **DO NOT** allow the power lead to touch hot surfaces.
- DO NOT connect the heater to a timer device or other equipment than can automatically switch the heater on or off.
- **DO NOT** operate the heater when you are tired or under the influence of alcohol, drugs or intoxicating medication.
- **DO NOT** stand on the heater.
- **DO NOT** use the heater with wet hands or when there is water on the power cord.
- DO NOT use the heater for anything other than its intended purpose. It is designed to provide heat in enclosed areas such as workshops and other industrial areas. It is not suitable for drying clothes or laundry.
- Position the heater at least a minimum of 1m at the front, rear and sides from any walls or objects.
- √ If an extension cable is required it must be of at least the same cross section as the heater cable. It must be as short as possible and fully unwound.
- ✓ Ensure that the heater is correctly turned off when not in use and store in a safe, dry, childproof location.

#### 1.4. OPERATIONAL PRECAUTIONS

- The heater must only be used by people who have read these instructions and have been trained in its use.
- **DO NOT** obstruct the air inlet and outlet sections of the heater.
- □ **WARNING!** In order to avoid overheating, **DO NOT** cover the heater.
- DO NOT use the heater without the grille fitted.
- **DO NOT** use if the heater has been dropped.
- DO NOT use if there are visible signs of damage to the heater.
- DO NOT touch the heater casing or grille when first switched off, as these will be very hot and will take time to cool.

NOTE: Children of less than 3 years should be kept away unless supervised continuously.

Children aged from 3 years and less than 8 years shall only switch on/off the appliance provided that it has been placed or installed in its intended normal operating position and they have been given supervision or instruction concerning use of the appliance in a safe way and understand the hazards involved. Children aged from 3 years and less than 8 years shall not plug in, regulate and clean the appliance or perform user maintenance.

**CAUTION:** Some parts of this product can become very hot and cause burns. Particular attention has to be given where children and vulnerable people are present.

NOTE: The heater must not be located immediately below a socket output.

#### 2. INTRODUCTION

Electric fan heater for industrial applications. Two heat settings with thermostat control, plus fan only option. A totally dry heat with no condensation, no gas, no fumes and no smell. Easily portable with a carry frame makes it ideal for workshops and garages. Includes tip over switch for added safety. 10,000Btu/hr (3KW) that can heat an area of 60m³. Supply 230V - 16A. Supplied with power cable only.

#### 3. SPECIFICATIONS

Model No:	EH3001.V2
Heated Area:	60m³
Output:	10,000Btu/hr
Plug Type:	Bare Wire
Power Supply Cable Length:	1.45m
Power:	1500/3000W
Supply:	230V - 16A


**IMPORTANT!** This unit is designed to raise the ambient temperature of an entire room, the temperature of the air coming out of the front of the heater will be warmer than the general temperature of the room, but there may not be a significant increase due to the large volume of air passing over the element. For the same reason, the element is hot during operation, but does not glow visibly. The room temperature depends on room size, insulation and the ambient temperature, which will increase as the room gets warmer.

# 4. OPERATION (FIG.1)

- **4.1.** Position heater in an upright position on a firm surface and at a safe distance from any obstructions, flammable substances etc. Keep to a minimum of 1m clearance at the rear and sides, and 2m clearance at the front.
- **4.2.** Connect the heater to a suitable mains supply.
- **4.3.** Set the thermostat dial to the maximum setting (fully clockwise).
- 4.4. The heater will switch on when the power setting selector is set to one of the two power settings.

**NOTE:** It will take up to three minutes for the heater to reach optimum temperature.

- 4.5. Once the room reaches the required temperature, heating element will stop working and the fan will stop. Once the temperature decreases, the heating element and fan will restart working automatically and thus keep the room temperature constant.
- **4.6.** For fan only operation, turn the power/fan selector to the fan only setting and set the thermostat to its minimum setting.
- **4.7.** When not in use, disconnect the heater from the mains supply. Store it in a safe, dry, childproof location.

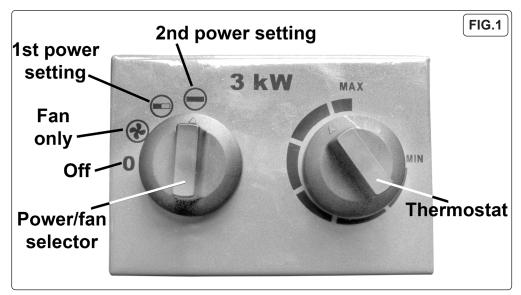

#### 5. MAINTENANCE

- □ **WARNING!** Before attempting any maintenance, ensure that the unit is unplugged from the mains power supply and that it has cooled down.
- **5.1.** Clean the heater with a soft dry cloth only. **DO NOT** use abrasives or solvents.
- **5.2.** Periodically check the heater grille to ensure that it is not blocked.
- 5.3. If the supply cord is damaged, it must be replaced by the manufacturer, its service agent or similarly qualified persons in order to avoid a hazard.



#### **ENVIRONMENT PROTECTION**

Recycle unwanted materials instead of disposing of them as waste. All tools, accessories and packaging should be sorted, taken to a recycling centre and disposed of in a manner which is compatible with the environment. When the product becomes completely unserviceable and requires disposal, drain any fluids (if applicable) into approved containers and dispose of the product and fluids according to local regulations.





### **WEEE REGULATIONS**

Dispose of this product at the end of its working life in compliance with the EU Directive on Waste Electrical and Electronic Equipment (WEEE). When the product is no longer required, it must be disposed of in an environmentally protective way. Contact your local solid waste authority for recycling information.

**Note**: It is our policy to continually improve products and as such we reserve the right to alter data, specifications and component parts without prior notice. Please note that other versions of this product are available. If you require documentation for alternative versions, please email or call our technical team on technical esaley.co.uk or 01284 757505.

Important: No Liability is accepted for incorrect use of this product.

Warranty: Guarantee is 12 months from purchase date, proof of which is required for any claim.

Jack Sealey Ltd t/a Sealey Group, Kempson Way, Suffolk Business Park, Bury St Edmunds, Suffolk, IP32 7AR UK Jack Sealey (EU) Ltd t/a Sealey Group, Farney Street, Carrickmacross, Co. Monaghan, A81 PK68 Ireland

Tel: 01284 757500 • Email: sales@sealey.co.uk • Web: www.sealey.co.uk

© Jack Sealey Limited Original Language Version EH3001.V2 Issue 5 (ERP) 10/07/25



# Information requirements for electric local space heaters

onom  omin  max.c	3.000 1.500 3.000	kW kW	Type of heat output/room temperature co Single stage heat output and no room temperature control Two or more manual stages, no room temperature control	Yes	ot one)
D min	1.500	kW	temperature control  Two or more manual stages, no room		No <b>√</b>
				.,	
max,c	3.000	kW	•	Yes	No <b>√</b>
			With mechanic thermostat room temperature control	Yes 🗸	No
			With electronic room temperature control	Yes	No 🗸
Power consumption			Electronic room temperature control plus  day timer  Yes  No   V		
D	0.00	W	Electronic room temperature control plus week timer	Yes	No 🗸
m	0.00	W	Other control options (multiple select	ions possil	ole)
dle	0.00	W	Room temperature control, with presence detection	Yes	No <b>√</b>
nsm	0.00	W	Room temperature control, with open window detection	Yes	No <b>√</b>
or status NO			With distance control option	Yes	No <b>√</b>
on	85	%	With adaptive start control	Yes	No <b>√</b>
			With working time limitation	Yes	No <b>√</b>
			With black bulb sensor	Yes	No 🗸
			With self-learning functionality	Yes	No <b>√</b>
			With control accuracy	Yes	No <b>√</b>
	dle	0.00 dle 0.00 asm 0.00 status NO	om 0.00 W  die 0.00 W  nsm 0.00 W  status NO	week timer  0.00 W Other control options (multiple select  Room temperature control, with presence detection  Room temperature control, with open window detection  NO With distance control option  With adaptive start control  With working time limitation  With self-learning functionality	week timer  0.00 W Other control options (multiple selections possited and the control options)  Room temperature control, with presence detection  Room temperature control, with open window detection  Yes  Status NO With distance control option  Yes  With adaptive start control  With working time limitation  Yes  With self-learning functionality  Yes