



# TOW POLE 2000KG ROLLING LOAD CAPACITY

MODEL NO: **TPK252.V2**

Thank you for purchasing a Sealey product. Manufactured to a high standard, this product will, if used according to these instructions, and properly maintained, give you years of trouble free performance.

**IMPORTANT:** PLEASE READ THESE INSTRUCTIONS CAREFULLY. NOTE THE SAFE OPERATIONAL REQUIREMENTS, WARNINGS & CAUTIONS. USE THE PRODUCT CORRECTLY AND WITH CARE FOR THE PURPOSE FOR WHICH IT IS INTENDED. FAILURE TO DO SO MAY CAUSE DAMAGE AND/OR PERSONAL INJURY AND WILL INVALIDATE THE WARRANTY. KEEP THESE INSTRUCTIONS SAFE FOR FUTURE USE.



Refer to instruction manual



Wear protective gloves

## 1. SAFETY

- ✓ Maintain the tow pole in good condition. If the tow pole is damaged, remove from service.
- ✓ Check vehicle manufacturer's instructions to determine whether the vehicle is equipped with proper tow fittings suitable for use with a tow pole. Also any check manufacturer's special instructions for vehicles with automatic transmission or four wheel drive.
- ✓ Use tow pole only on vehicles with standard tow eyes. **DO NOT** use transportation 'tie down' points.
- ✓ Ensure the tow eyes and the areas of the vehicles to which the eyes are fitted are strong and solid enough for towing. **DO NOT** use the tow pole if there is damage or heavy rust around the fitting area and ensure the eyes are approximately the same height from the ground.
- ✓ Place an "ON TOW" notice in the back window or other visible location at the rear of the towed vehicle. Attach a red marker (provided) to the centre of the tow pole. The vehicle to be towed must be fully legal in respect of having the registration number visible at all times, must have a valid road tax, insurance and relevant current DfT test certificate. **DO NOT** tow a vehicle that lacks one or more of these requirements.
- ✓ Towed vehicle must have the ignition on in order to operate lights, brake lights and indicators. If these lights cannot be operated, you must fit a repeater trailer board to towed vehicle. Contact your local Sealey stockist for information relating to approved towing boards which must incorporate lighting and signalling equipment.
- ✓ Ensure that the person in the towed vehicle is aware that, if servo brakes and/or power steering are fitted, then braking and/or steering efforts will be very much higher than normal when the engine is not running.
- ✓ Read vehicle manufacturers instructions before use.
- ✓ Maximum rolling load capacity 2000kg.
- ✗ **DO NOT** exceed the rated capacity of the tow pole.
- ✗ **DO NOT** exceed a maximum towing speed of 15mph.
- ✗ **DO NOT** use the tow pole if damaged.
- ✗ **DO NOT** tow vehicle if the steering lock cannot be disengaged.
- ✗ **DO NOT** use the tow pole on a vehicle with defective braking system.
- ✗ **DO NOT** tow an unmanned vehicle.
- ✗ **DO NOT** force the tow pole to achieve a task it was not designed to perform.
- ✗ **DO NOT** allow untrained persons to use the tow pole.
- ✗ **DO NOT** operate the tow pole if any parts are missing as this may cause failure and possible personal injury.



## 2. INTRODUCTION

2tonne Rolling load capacity tow pole. Steel sections clip together and fix with spring clips. Hooks feature sliding locking mechanism to prevent disengagement during towing/overrun.

## 3. SPECIFICATION

Model no: ..... TPK252.V2  
 Tow pole length ..... 1.8m  
 Maximum rolling load capacity ..... 2tonne


## 4. TOWING INFORMATION

IMPORTANT INFORMATION REGARDING THE TOWING OF VEHICLES WITH AUTOMATIC TRANSMISSION AND FOUR WHEEL DRIVE VEHICLES.

- 4.1. **Before towing a four wheel drive vehicle or a vehicle with automatic transmission it is essential to consult the manufacturer's handbook for the vehicle to be towed to check the correct towing procedure.** The correct procedure will vary from vehicle to vehicle depending on the configuration of the transmission. (In some cases certain 4WD vehicles cannot be towed with all four wheels on the ground and will have to be transported on a trailer). Failure to observe the correct procedure could result in severe damage to the vehicle's transmission.
- 4.2. Many automatic transmissions require the engine to be active in order to drive a pump that provides lubrication to the transmission. If the transmission is turned by the road wheels without the engine running, permanent damage could be done to the transmission due to lack of lubrication. This could also apply to the secondary gearbox on a four wheel drive vehicle.
- 4.3. Four wheel drive systems are designed to run in tandem with the engine. If the engine is off but the transmission is driven at speed by the road wheels, the mismatch in speed between components within the gearboxes could also result in permanent damage to the transmission.
- 4.4. It is usually possible to tow four wheel drive vehicles with manual transmission as the engine can be disconnected from the primary gearbox. However, the road wheels may still be driving a secondary gearbox. The manufacturer will state in which drive position the secondary gearbox should be placed, and will recommend a maximum towing speed. A towing distance and/or time limit may also be imposed by the manufacturer.
- 4.5. Some four wheel vehicles are fitted with devices to disconnect the hubs and/ or driveshafts especially for towing purposes.
- 4.6. Consult the manufacturer's handbook before reversing with a four wheel drive vehicle attached or a vehicle with automatic transmission.
- 4.7. **REMEMBER, ALWAYS FOLLOW THE VEHICLE MANUFACTURERS RECOMMENDATIONS FOR THE VEHICLE TO BE TOWED.**

## 5. ASSEMBLY

- 5.1. Remove contents from packing and check to ensure everything is correct and undamaged. Should you experience any problems contact your supplier immediately.
- 5.2. Fit the two hook sections (A&B) into the centre section (C) and locate section A only with pin (D). Retain pin with clip (E).
- 5.3. Alternative pin holes are provided in the centre section for horizontal or vertical tow eyes so that the hooks (G & J) are always square to the eyes.
- 5.4. **USE**
- 5.5. Position vehicles so that the distance between the towing eyes is approximately 1.8 metres.
- 5.6. Slide back and rotate hook gate (F) clear and then fit hook (G) through vehicle towing eye. If towing eye is horizontal, the hook must have the gap downwards, as shown in diagram.
- 5.7. Push the hook gate (F) up against the tow eye and retain it in position with pin (H) and clip (E).
- 5.8. Similarly fit and retain hook (J) to the towing eye of the second vehicle sliding section (B) into, or out of, section (C) as necessary
- 5.9. Carefully move towing vehicle backwards or forwards to align pin holes in sections (B & C). Locate with pin (D). Retain pin with clip (E).

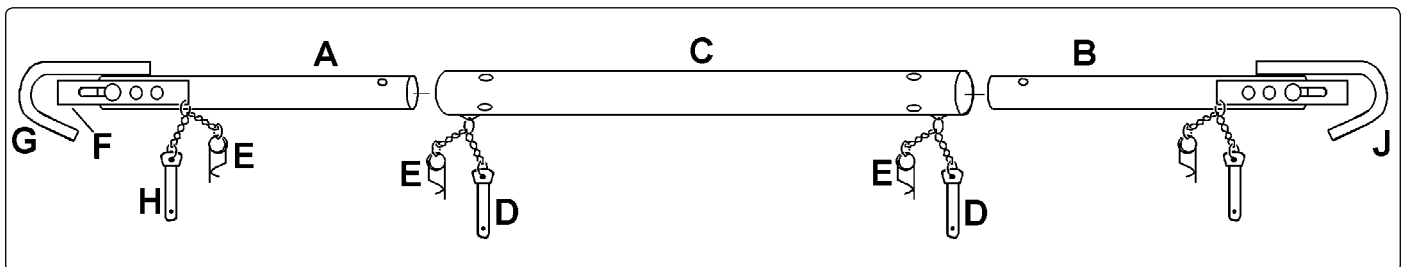

## 6. TOWING PROCEDURE

- TPK252.V2 has a rolling load capacity of 2,000 kg, based on a level surface. Remember the weight of towed vehicle should be calculated to include any load in the vehicle, and to take into account any extreme gradients.
  - **WARNING! Before using equipment ensure you have read, understood and apply Section 1 safety instructions.**
- TOWING EYES** - Many vehicle manufacturers include a separate towing eye which is not permanently fixed to the chassis. **Important: Before fitting the tow pole, to either vehicle, check the manufacturers' handbooks to ensure that the towing points (do not use 'tie points') are suitable for use with a tow pole and are capable of safely withstanding a 'brake load'.**
- LEGAL REQUIREMENTS** - It is the responsibility of the towing driver to ensure that all legal requirements are met. This includes the towing operation and actions taken by the towed driver. Check you are insured for towing. Trade users must have a "Trade Insurance Policy" which covers commercial towing. Note the policy will not provide cover if the law is broken, or the weight of towed load exceeds the capacity of the tow pole, or if towed vehicle weighs more than the towing vehicle. When calculating the weight of the towed vehicle remember that any load carried in the vehicle must be added to the kerb weight indicated in the manufacturer's handbook.
- 6.1. When towing, unlock the steering wheel and activate the warning lights on both vehicles. Ensure that the towed vehicle is in neutral, the wheels are free to rotate, and that hand and foot brakes are disengaged.
  - 6.2. While driving, the tow pole must remain parallel with the direction of travel, i.e. if the tow fittings are placed on different sides of the vehicles, it will be necessary to drive out of line (the car being towed would not be directly behind the one towing). Pole must also be approximately parallel with the road surface i.e. with the towing eyes at similar height
  - 6.3. The distance between the vehicles must be enough for the driver in the towed vehicle to see the rear lights of the towing vehicle.
  - 6.4. **A MAXIMUM SPEED OF 15MPH** should not be exceeded.
  - 6.5. Always take great care when towing and ensure a very gradual "take-up" when starting and braking.  
**WARNING!** The tow pole and fittings are not able to withstand shock loads resulting from sudden changes in speed.

- 6.6. After use, dismantle the tow pole, clean it and store it in a dry place. Inspect regularly for signs of stress or wear. Replacement parts are not available for this unit.

Parts support is available for this product. Please email [sales@sealey.co.uk](mailto:sales@sealey.co.uk) or telephone 01284 757500



#### ENVIRONMENT PROTECTION

Recycle unwanted materials instead of disposing of them as waste. All tools, accessories and packaging should be sorted, taken to a recycling centre and disposed of in a manner which is compatible with the environment. When the product becomes completely unserviceable and requires disposal, drain any fluids (if applicable) into approved containers and dispose of the product and fluids according to local regulations.

**Note:** It is our policy to continually improve products and as such we reserve the right to alter data, specifications and component parts without prior notice. Please note that other versions of this product are available. If you require documentation for alternative versions, please email or call our technical team on [technical@sealey.co.uk](mailto:technical@sealey.co.uk) or 01284 757505.

**Important:** No Liability is accepted for incorrect use of this product.

**Warranty:** Guarantee is 12 months from purchase date, proof of which is required for any claim.

Sealey Group, Kempson Way, Suffolk Business Park, Bury St Edmunds, Suffolk. IP32 7AR



01284 757500



01284 703534



[sales@sealey.co.uk](mailto:sales@sealey.co.uk)



[www.sealey.co.uk](http://www.sealey.co.uk)